

# Symmetrical




## LED COLOUR TEMPERATURE


3000K · 6000K

## OUTER DIMENSIONS & ACCESSORIES

Unit:mm

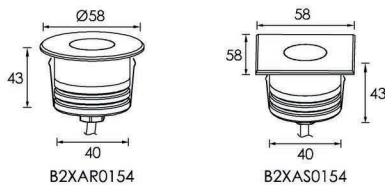

## OPTIONAL HONEYCOMB LOUVER

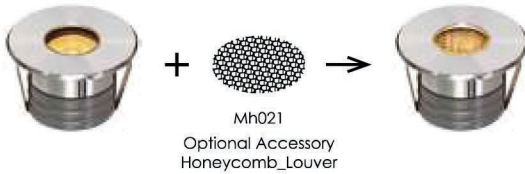

## OPTICS



B34D



30°  
L0130F023YH

## MATERIAL SPECIFICATIONS


- HOUSING** | 12# Die-casting dark grey powder coated aluminum  
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
- FRONT RING** | Hard chrome plated stainless steel SUS 316#
- LIGHT WINDOW** | Tempered frosted step glass. T=7mm
- LED** | NICHIA
- GLASS PRESSURE CAPACITY** | Full area=1106kgs
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 2X1.0mm<sup>2</sup> L=0.5m
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali

## INSTALLATION DIAGRAM



A: Minimum space for external driver is 48mm




## IMPRESSION DRAWING OF LENS B34D

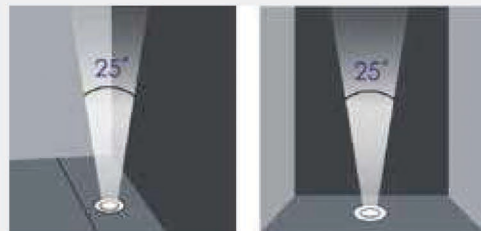

## TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
<b>B2XAR0154</b>	1×2W Single color	B34D	25°	24V DC	100	2.4	Cool White = 130 Warm White = 110	08
<b>B2XAS0154</b>	1×2W Single color	B34D	25°	24V DC	100	2.4	Cool White = 130 Warm White = 110	08

## PHOTOMETRIC CURVES

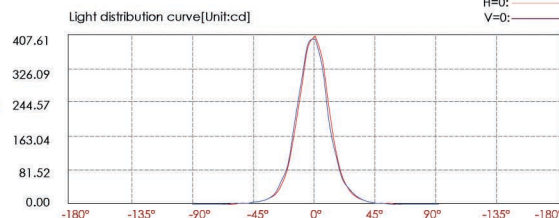

Lux distance cure

Distance (m)	Center beam LUX	Beam width V (m)	Beam width H (m)
2m	101.90LUX	0.9m	0.9m
4m	25.48 LUX	1.8m	1.8m
6m	11.32 LUX	2.7m	2.6m
8m	6.37LUX	3.6m	3.5m
10m	4.08LUX	4.5m	4.4m
12m	2.83 LUX	5.4m	5.3m

Ver.Spread:25.3 Horiz.Spread:24.7