

Asymmetrical



LED COLOUR TEMPERATURE

3000K · 6000K

OPTICS




C9



45°
35°
L01 45° F023YH
35°

OUTER DIMENSIONS & ACCESSORIES


Unit:mm



MATERIAL SPECIFICATIONS

- HOUSING** | 12# Die-casting dark grey powder coated aluminum
T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
- FRONT RING** | Hard chromeplated stainless steel SUS 316#
- LIGHT WINDOW** | Tempered frosted step glass.T=7mm
- LED** | NICHIA
- GLASS PRESSURE CAPACITY** | Full area=1106kgs
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 2X1.0mm2 L=0.5m
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali

OPTIONAL HONEYCOMB LOUVER

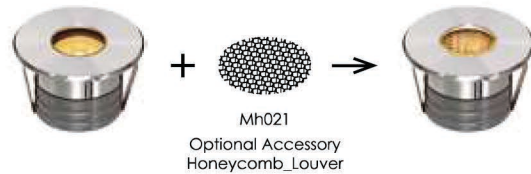

INSTALLATION DIAGRAM



A: Minimum space for external driver is 48mm



IMPRESSION DRAWING OF LENS C9



TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
C2XAR0154	1×2W Single color	C9	45° 35°	24V DC	100	2.4	Cool White = 100 Warm White = 88	08

PHOTOMETRIC CURVES

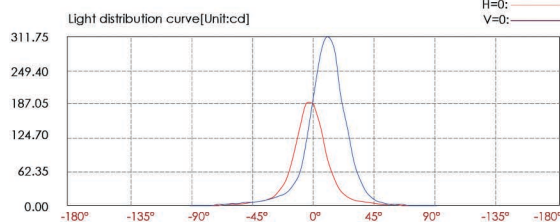

Light distance curve

Center beam LUX	Beam width V	H
46.98LUX	0.9m	0.9m
11.75LUX	1.7m	1.9m
5.22LUX	2.6m	2.8m
2.94LUX	3.4m	3.7m
1.88LUX	4.3m	4.7m
1.31 LUX	5.1m	5.6m

Ver.Spread:24.0 Horiz.Spread:26.2