



Symmetrical

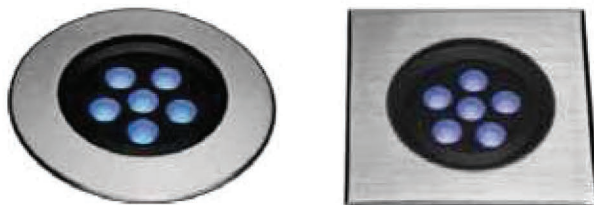

LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

OPTICS

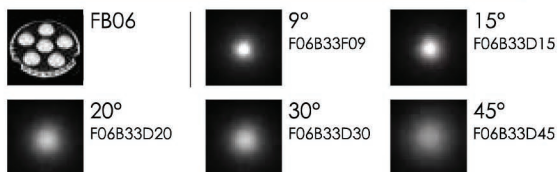


MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting dark grey powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
FRONT RING	Hard chrome plated stainless steel SUS 316L#
LIGHT WINDOW	Tempered frosted step glass. T=8mm
LED	OSRAM
GLASS PRESSURE CAPACITY	Full area=3370kgs
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m(low voltage) H05RN-F 3X1.0mm ² L=0.5m(high voltage)
DIMMABLE SUPPORT	Triac PWM 1-10V Dali

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

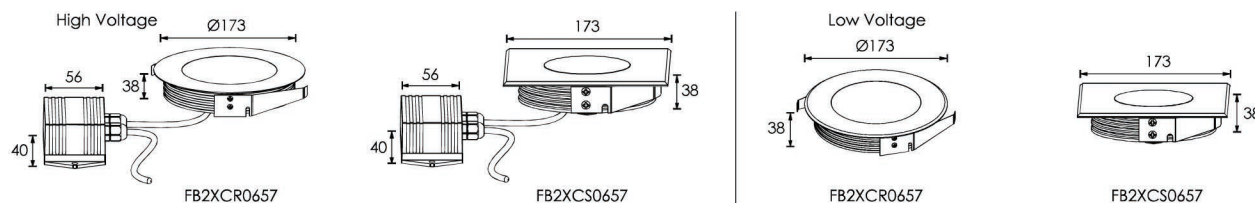

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
FB2XCR0657	6×2W Single color	FB06	20°	24V DC 120/240	24V = 541 120V = 111 240V = 64	24V = 13 120V = 13.5 240V = 13.7	Cool White = 956 Warm White = 783	08
FB2XCS0657	6×2W Single color	FB06	20°	24V DC 120/240	24V = 541 120V = 111 240V = 64	24V = 13 120V = 13.5 240V = 13.7	Cool White = 956 Warm White = 783	08

PHOTOMETRIC CURVES

