

Asymmetrical



LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

OPTICS



FC04




45°
35°
F06C10 45°
35°

MATERIAL SPECIFICATIONS

- HOUSING** | 12# Die-casting dark grey powder coated aluminum
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
- FRONT RING** | Hard chrome plated stainless steel SUS 316L#
- LIGHT WINDOW** | Tempered frosted step glass. T=8mm
- LED** | OSRAM
- GLASS PRESSURE CAPACITY** | Full area=3370kgs
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 2X1.0mm2 L=0.5m(low voltage)
H05RN-F 3X1.0mm2 L=0.5m(high voltage)
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

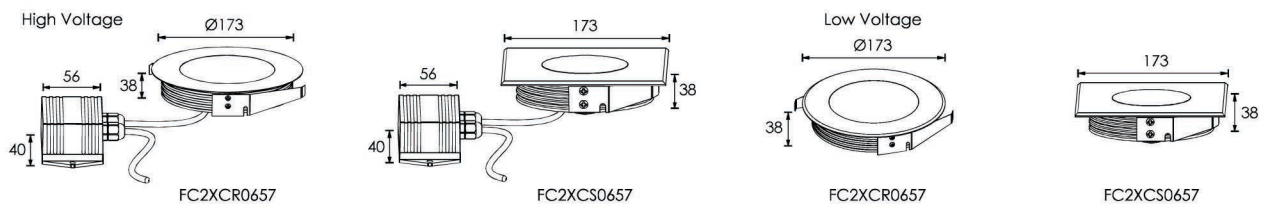

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
FC2XCR0657	6×2W Single color	FC04	45°	24V DC	24V = 541	24V = 13	Cool White = 753 Warm White = 613	08
			35°	120/240	120V = 111 240V = 64	120V = 13.5 240V = 13.7		
FC2XCS0657	6×2W Single color	FC04	45°	24V DC	24V = 541	24V = 13	Cool White = 757 Warm White = 613	08
			35°	120/240	120V = 111 240V = 64	120V = 13.5 240V = 13.7		

PHOTOMETRIC CURVES

