


Strong Load Bearing Capacity

Spot type LED Drive-Over Light/Stainless Steel Front Cover

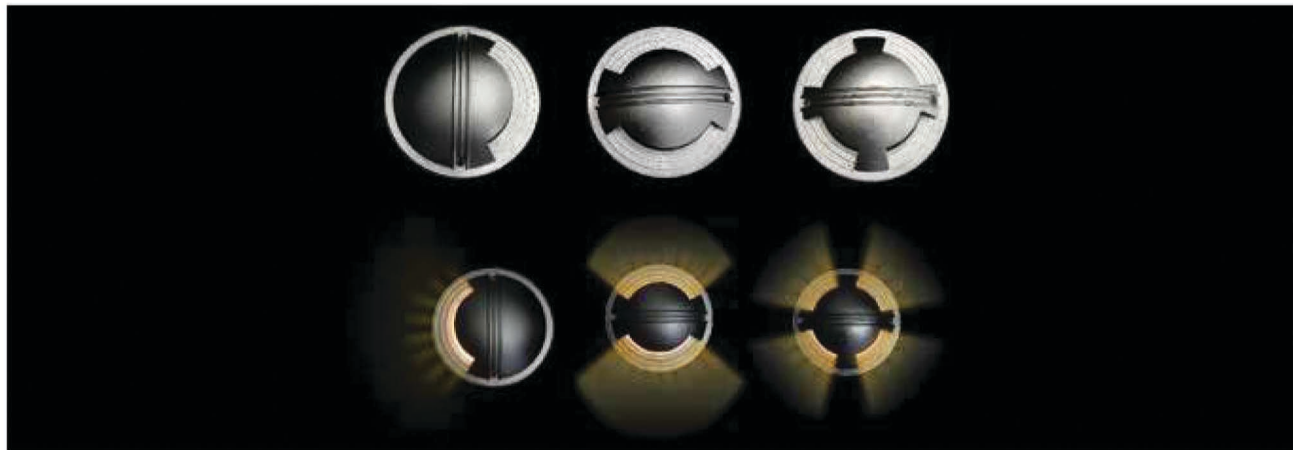


LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

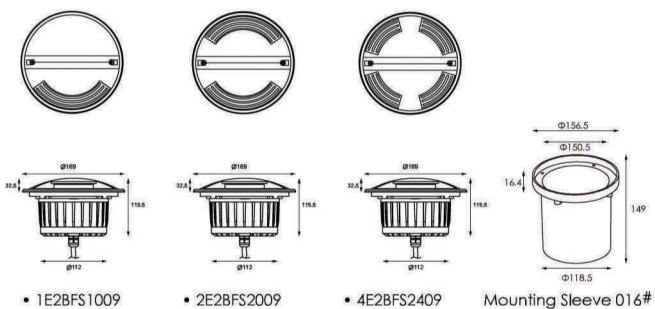

OPTICS

N/A

MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting dark grey powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
FRONT COVER	Hard chromeplated stainless steel SUS 316#
LOADING CAPACITY	>2000kg
CABLE GLAND	IP68 PG-9 PA66
GASKET	Molding shaped silicone seal
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	H07RN-F 2X1.0mm ² L=0.5m(low voltage) H07RN-F 3X1.0mm ² L=0.5m(high voltage)
MOUNTING SLEEVE	ABS D16#
DIMMABLE SUPPORT	Triac PWM 1-10V Dali

TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	IK
1E2BFS1009	10×Φ5 LED	24V DC 120 / 240	24V = 34 120V = 25 240V = 17	24V = 0.8 120V = 1.2 240V = 1.4	10
2E2BFS2009	20×Φ5 LED	24V DC 120 / 240	24V = 68 120V = 36 240V = 21	24V = 1.6 120V = 2.1 240V = 2.1	10
4E2BFS2409	24×Φ5 LED	24V DC 120 / 240	24V = 71 120V = 38 240V = 23	24V = 1.7 120V = 2.4 240V = 2.4	10

PHOTOMETRIC CURVES

