


Recessed LED Stair Light & Wall Light

Stainless steel front cover with Matt Surface

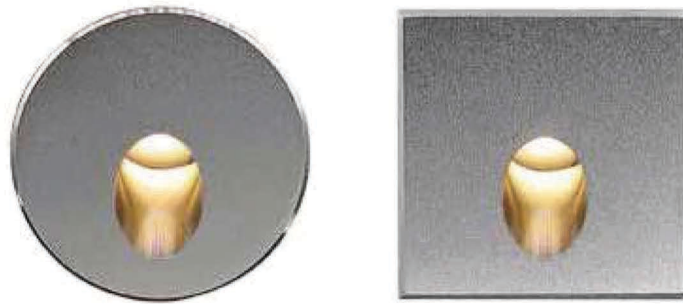

LED COLOUR TEMPERATURE


2000K · 3000K · 6000K

OPTICS

N/A

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

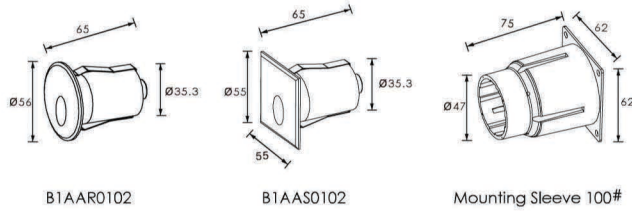


MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting aluminum T=20-25μm. Adhesion of ISO class 1/ ASTM class 4B high temperature painting
FRONT COVER	Hard chrome-plated stainless steel SUS 316#
LIGHT SOURCE	1 OSRAM
LED DRIVER	1 OSRAM
OPERATING TEMPERATURE	1 Constant Voltage Input, Constant Current Output 1 -20°C~40°C
POWER CABLE	1 H05RN-F 2X1.0mm ² L=0.3m (low voltage)
MOUNTING SLEEVE	1 ABS 100 #
DIMMABLE SUPPORT	1 Triac PWM 1-10V Dim


TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
B1AAR0102	1×2W	L0180C010AR	50°	24V DC	100	2.4	Cool White = 40 Warm White = 36	10
B1AAS0102	1×2W	L0180C010AR	50°	24V DC	100	2.4	Cool White = 40 Warm White = 36	10

PHOTOMETRIC CURVES

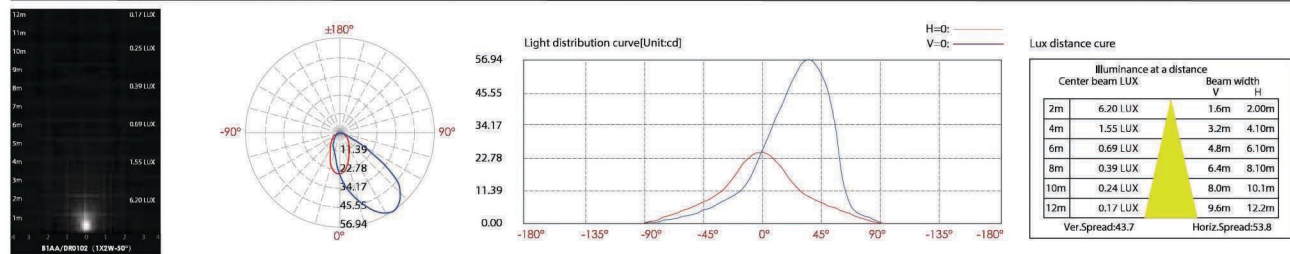

LIGHTING EFFECT DEMO & INSTALLATION

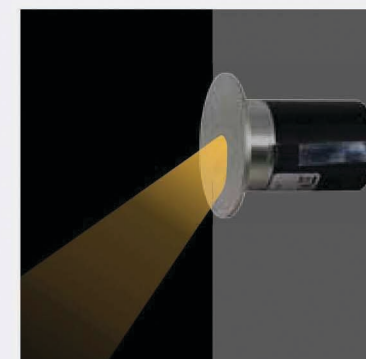

Wall Recessed



Installation with clips embedded into sleeve, fix on the concrete wall



Installation with clips directly