


Asymmetrical Recessed LED Stair Light & Wall Light



LED COLOUR TEMPERATURE


2000K · 3000K · 6000K

OPTICS

N/A

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

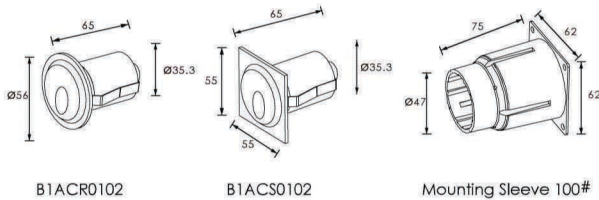

MATERIAL SPECIFICATIONS

HOUSING&FRONT COVER	12 # Die-casting aluminum T=20-25μm. Adhesion of ISO class 1/ ASTM class 4B high temperature painting
LIGHT SOURCE	1 OSRAM
LED DRIVER	1 Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	1 -20°C~40°C
POWER CABLE	1 H05RN-F 2X1.0mm ² L=0.3m(low voltage)
MOUNTING SLEEVE	1 ABS 100 #
DIMMABLE SUPPORT	1 Triac PWM 1-10V Dali

FRONT COVER COLOR



Sanded Brown
RAL8019



Sanded Black
RAL9005



Silver Resistant Paint
RAL9006

LIGHTING EFFECT DEMO



Wall recessed



Installation with clips embedded
into sleeve, fix on the concrete wall



Installation with clips
directly

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
B1ACR0102	1×2W	L0180C010AR	70°	24V DC	100	2.4	Cool White = 51 Warm White = 46	10
B1ACS0102	1×2W	L0180C010AR	70°	24V DC	100	2.4	Cool White = 51 Warm White = 46	10

PHOTOMETRIC CURVES

