

Recessed LED Stair Light & Wall Light

LED COLOUR TEMPERATURE

2000K • 3000K • 6000K

OPTICS



B38



30°

L0130D014YH




40°

L0140D014YH



OUTER DIMENSIONS & ACCESSORIES

Unit:mm

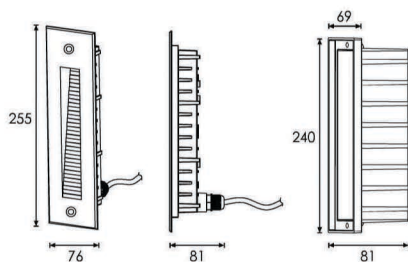

Mounting Sleeve 074#

MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
FRONT COVER	12# Die-casting aluminum
LIGHT WINDOW	1 Tempered glass T=2mm
CABLE GLAND	1 IP68 PG-9 PA66
GASKET	1 Molding shaped silicone seal
LED DRIVER	1 Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	1 -20°C~40°C
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
MOUNTING SLEEVE	1 ABS 074#
DIMMABLE SUPPORT	1 Triac PWM 1-10V Dali

FRONT COVER COLOR

Basic



Sanded Dark Grey
KAP 7037

Secondary





Silver Grey
KAP 9022



Sanded Black
RAL9005

MOUNTING SLEEVE CHARACTERISTIC



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
B1BG0257	2x1.5W	B38	30°	24V DC 120/240	24V = 150 120V = 36 240V = 22	24V = 3.6 120V = 3.6 240V = 3.8	Cool White = 106 Warm White = 94	10

PHOTOMETRIC CURVES

