

LED RECESSED WALL LIGHT



OPTICS


N/A

LED COLOUR TEMPERATURE

2000K • 3000K • 6000K

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

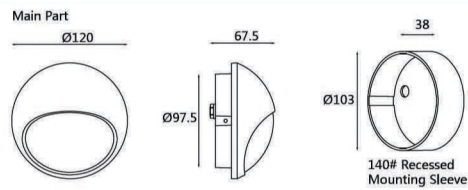



MATERIAL SPECIFICATIONS

- HOUSING** | 12# Die-casting dark grey powder coated aluminum
T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
- LIGHT WINDOW** | PC T=6mm
- GASKET** | Tooling shaped seal
- DRIVER** | Constant Voltage Input, Constant Current Output
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 3×1.0mm² L=0.3m (high voltage)

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)
D1AK1833	18×0.15W NICHIA	110°	240	24	3	117

PHOTOMETRIC CURVES

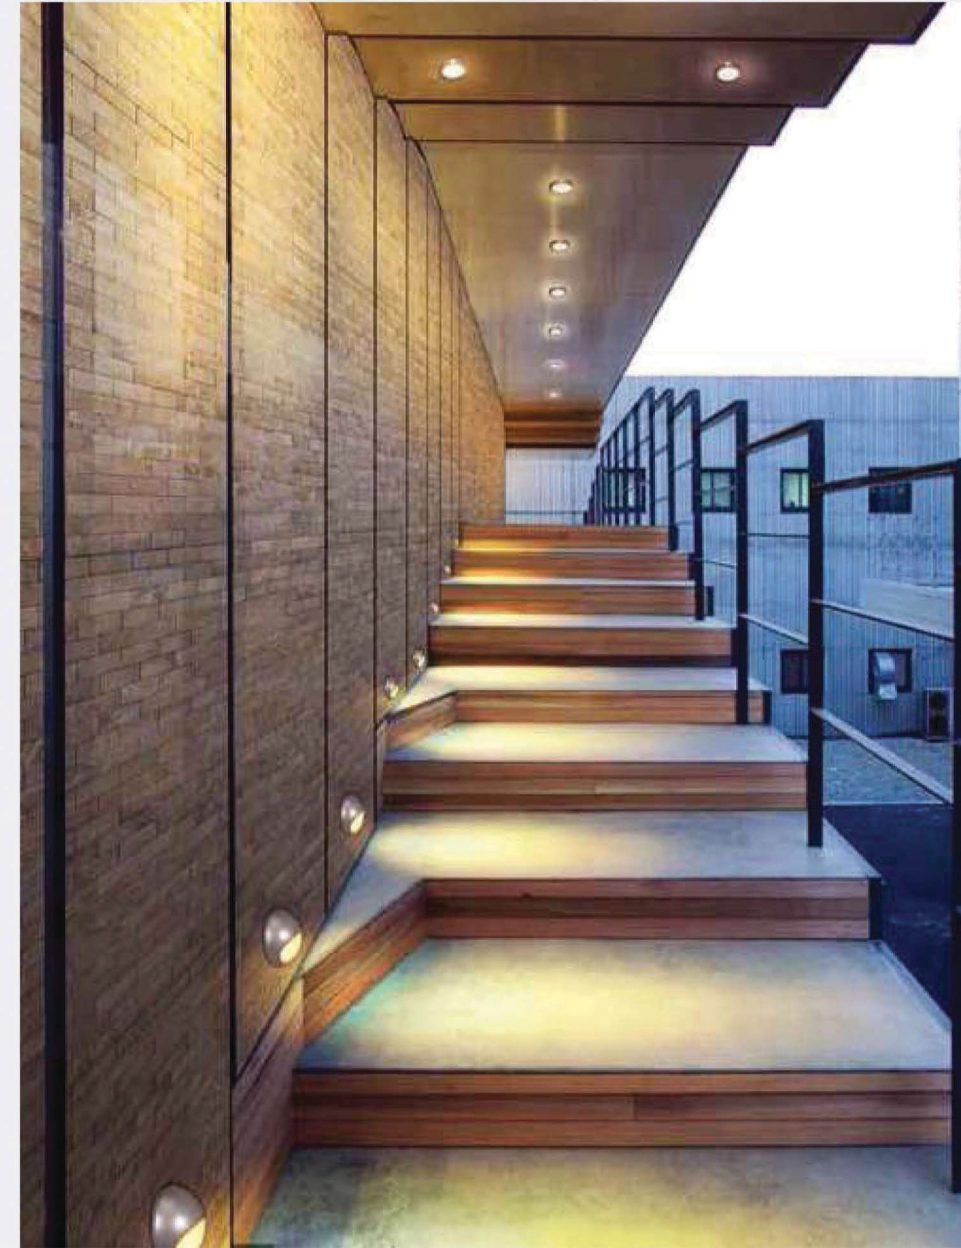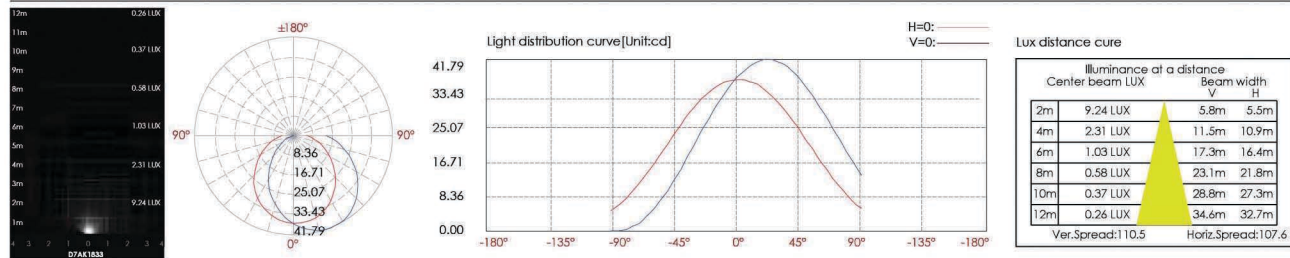

Recessed mounted by 140# sleeve

HOUSING COLOR OPTION

Basic



Dark Grey
KAP 7037

Secondary



Silver Resistant Paint
RAL 9006



Sanded Black
RAL9005