

LED RECESSED WALL LIGHT



LED COLOUR TEMPERATURE


2000K · 3000K · 6000K

OPTICS

N/A

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

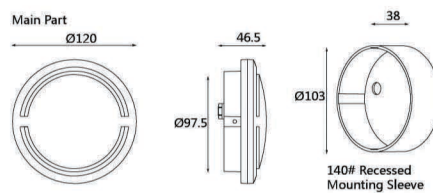


MATERIAL SPECIFICATIONS

- HOUSING** | 12# Die-casting dark grey powder coated aluminum
T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
- LIGHT WINDOW** | PC T=6mm
- GASKET** | Tooling shaped seal
- DRIVER** | Constant Voltage Input,Constant Current Output
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 3×1.0mm² L=0.3m(high voltage)

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)
D1A12832	28×0.1W NICHIA	130	240	14	3	12

PHOTOMETRIC CURVES

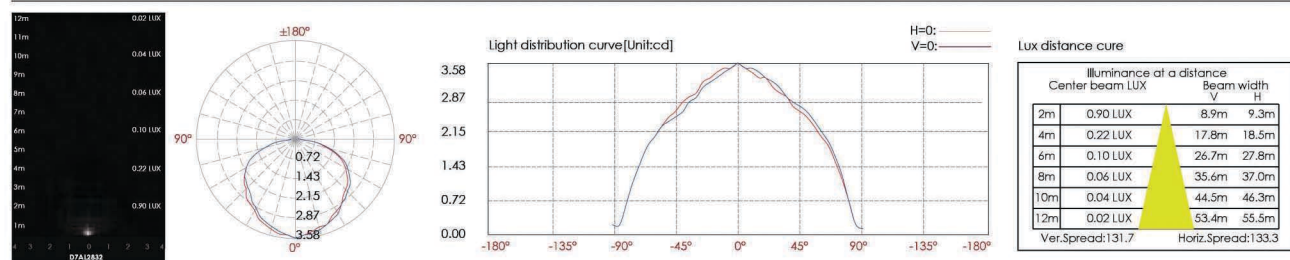

HOUSING COLOR OPTION

Basic



Dark Grey
KAP 7037

Secondary



Silver Resistant Paint
RAL 9006



Sanded Black
RAL9005



Recessed mounted
by 140# sleeve