

Recessed LED Stair Light & Wall Light

LED COLOUR TEMPERATURE



2000K • 3000K • 6000K

OPTICS


N/A

OUTER DIMENSIONS & ACCESSORIES

Unit:mm



Mounting Sleeve 074#

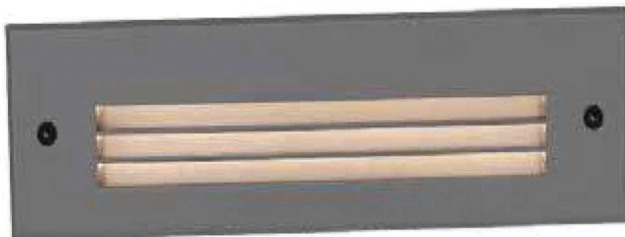

MATERIAL SPECIFICATIONS

HOUSING & FRONT COVER	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	PC T=3mm
CABLE GLAND	IP68 PG-9 PA66
GASKET	Molding shaped silicone seal
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
MOUNTING SLEEVE	ABS 074#
DIMMABLE SUPPORT	Triac PWM 1-10V Dim

FRONT COVER COLOR

Basic



Sanded Dark Grey
KAP 7037

Secondary




Silver Resistant Paint
RAL 9006



Sanded Black
RAL9005

MOUNTING SLEEVE CHARACTERISTIC



Low Voltage Type



High Voltage Type

- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
D1BB5407	54xSMD2835	24V DC 120/240	24V = 220 120V = 95 240V = 53	24V = 5.3 120V = 6.4 240V = 6.8	Cool White = 47 Warm White = 44	09

PHOTOMETRIC CURVES

