


Recessed LED Stair Light & Wall Light

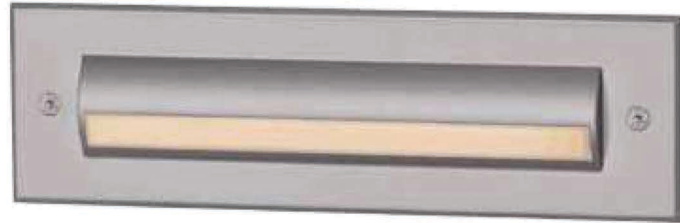

LED COLOUR TEMPERATURE


2000K · 3000K · 6000K

OPTICS

N/A

OUTER DIMENSIONS & ACCESSORIES

Unit:mm





MATERIAL SPECIFICATIONS

- HOUSING** | 12# Die-casting grey powder coated aluminum
| T=60-80um Adhesion of ISO class 1/ASTM class 4B
- FRONT COVER** | 12# Die-casting aluminum
- LIGHT WINDOW** | PC T=3mm
- CABLE GLAND** | IP68 PG-9 PA66
- GASKET** | Molding Shaped silicone seal
- LED DRIVER** | Constant Voltage Input, Constant Current Output
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 2X1.0mm2 L=0.5m (low voltage)
| H05RN-F 3X1.0mm2 L=0.5m (high voltage)
- MOUNTING SLEEVE** | ABS 074#
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dim

TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
D1BE2817	28×SMD3030	24V DC	24V = 210	24V = 5	Cool White = 82 Warm White = 65	09
		120/240	120V = 92	120V = 6.5		
			240V = 53	240V = 6.4		

PHOTOMETRIC CURVES

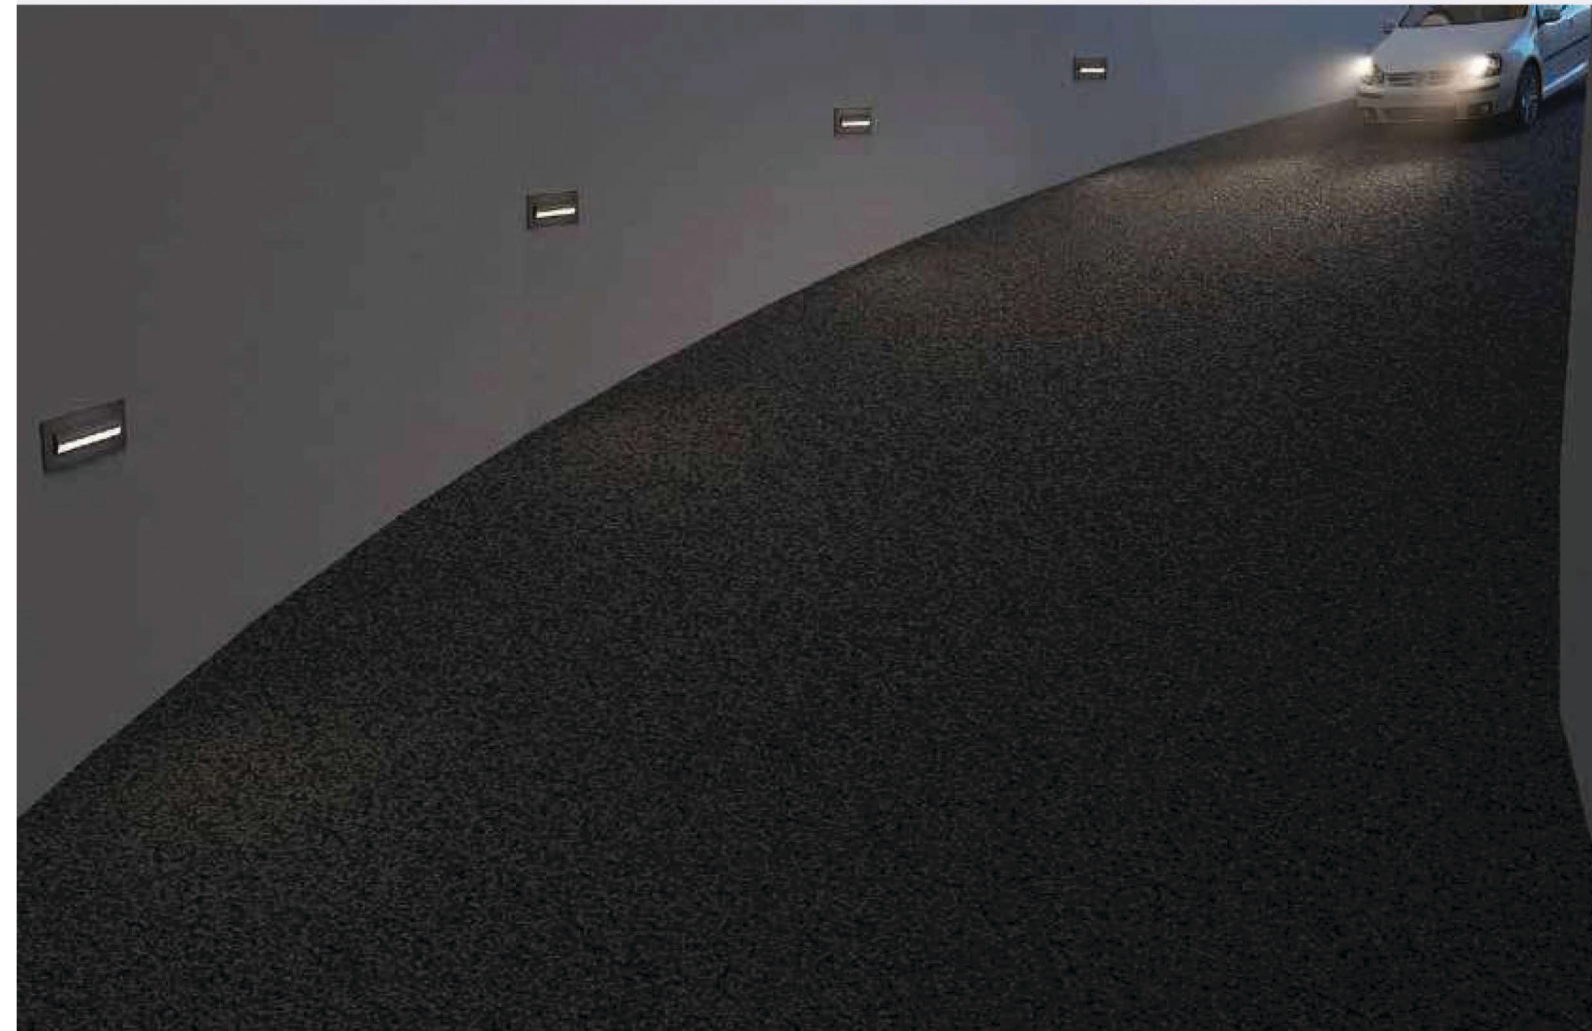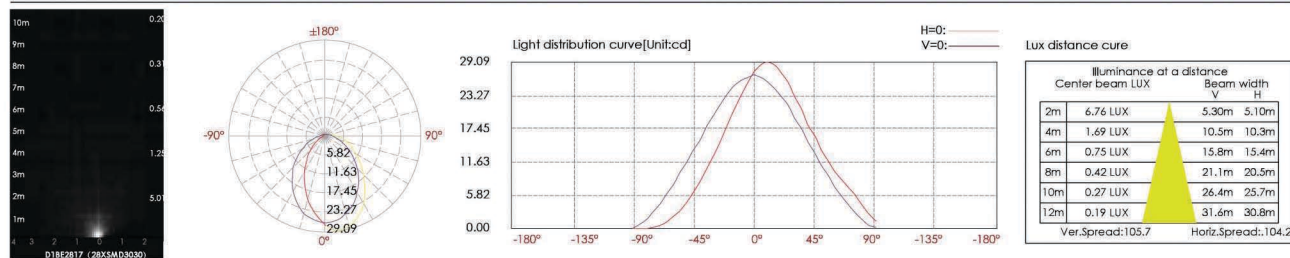

FRONT COVER COLOR

Basic



Sanded Dark Grey
KAP 7037

Secondary





Silver Resistant Paint
RAL 9006



Sanded Black
RAL9005

MOUNTING SLEEVE CHARACTERISTIC



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.