


# Diffused Beam Recessed LED Wall Light

Stainless steel front cover with Matte Surface

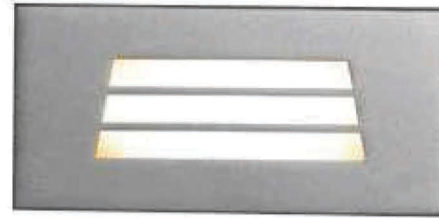


### LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

### OUTER DIMENSIONS & ACCESSORIES

Unit:mm

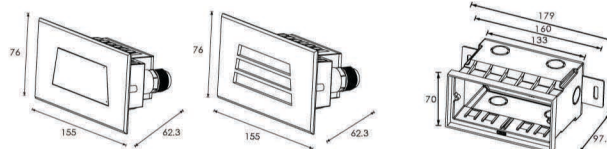

D1CD1834

D1CC1834

Mounting Sleeve 090#

### OPTICS

N/A


### MATERIAL SPECIFICATIONS

- HOUSING** | 12# Die-casting grey powder coated aluminum  
| T=60-80um Adhesion of ISO class 1/ASTM class 4B
- FRONT COVER** | Hard chromeplated Stainless steel 316#
- LED** | SMD3030 type LED
- CABLE GLAND** | IP67 PG9 PA66
- GASKET** | Molding shaped silicone seal
- LED DRIVER** | Constant Voltage Input, Constant Current Output
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 2X1.0mm2 L=0.5m (low voltage)  
| H05RN-F 3X1.0mm2 L=0.5m (high voltage)
- MOUNTING SLEEVE** | ABS 090#
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali

### TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
D1CD1834	18x0.2W	24V DC	24V = 125	24V = 3.0	Cool White = 80 Warm White = 70	09
		120/240	120V = 56	120V = 3.4		
		240V = 29	240V = 3.9			
D1CC1834	18x0.2W	24V DC	24V = 125	24V = 3.0	Cool White = 65 Warm White = 56	09
		120/240	120V = 56	120V = 3.4		
		240V = 29	240V = 3.9			

### PHOTOMETRIC CURVES

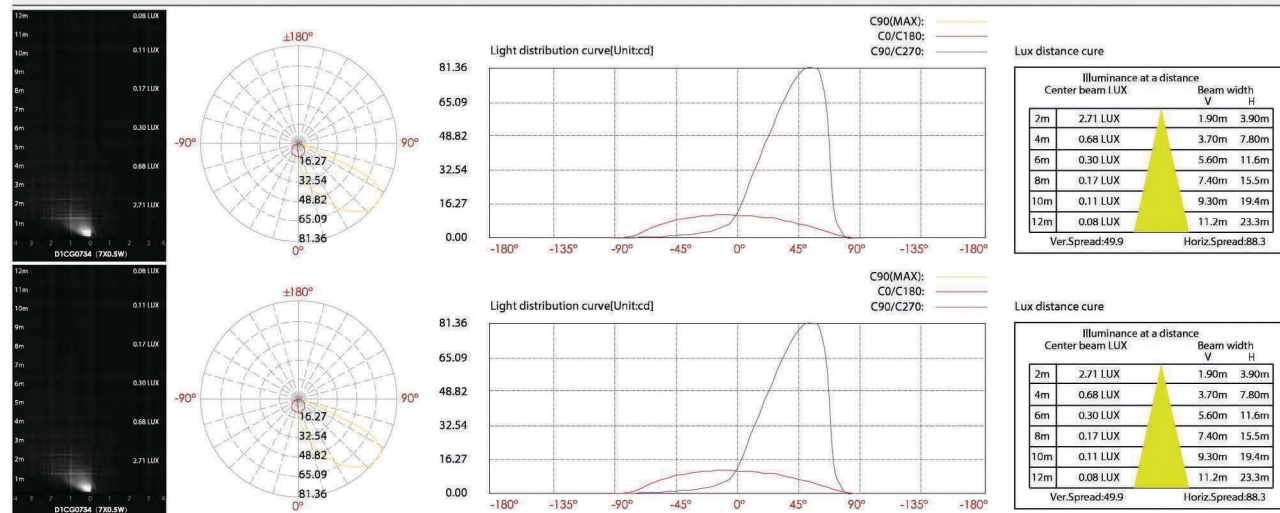

### MOUNTING SLEEVE CHARACTERISTIC



•The clips have been specially modified and upgraded to have a stronger structure in order to make up the absence of the screw fixing.

•There are two metal support plates on the bottom of the sleeve. It is used for fixing and preventing the mounting sleeve shifting while filling the concrete.  
•These will simply installer and electrician while they are recessing the sleeves.

