

Recessed LED Stair Light & Wall Light




LED COLOUR TEMPERATURE

2000K • 3000K • 6000K

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

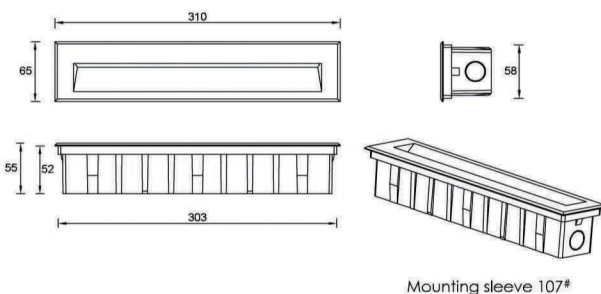

OPTICS

N/A


MATERIAL SPECIFICATIONS

Housing & Front cover	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Light Window	Glass T=1.8mm
Cable gland	IP67 copper and nicked coated
Gasket	Molding shaped silicone seal
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
Mounting sleeve	ABS 107*
Dimmable Support	Triac. PWM 1-10V Dim

TECHNICAL DATA

Item	Light source	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D1DA3034	30×0.3W	120°	24VDC 240V	24V = 380 240V = 44	24V = 9.1 240V = 10	Cool white =330 Warm white =292	10

PHOTOMETRIC CURVES

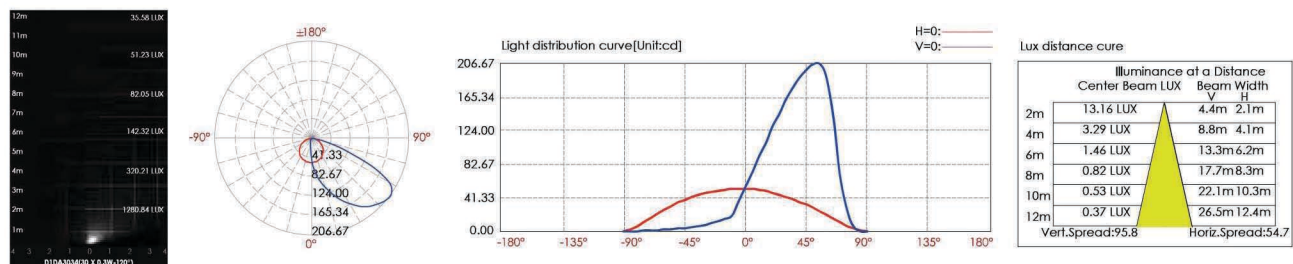

Front Cover Color Option

Basic	Sanded Dark Grey KAP 7037	
Secondary	Silver Grey KAP 9022	
	Sanded Black RAL9005	

Mounting sleeve characteristic



•The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
•Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.