


# Recessed LED Stair Light & Wall Light

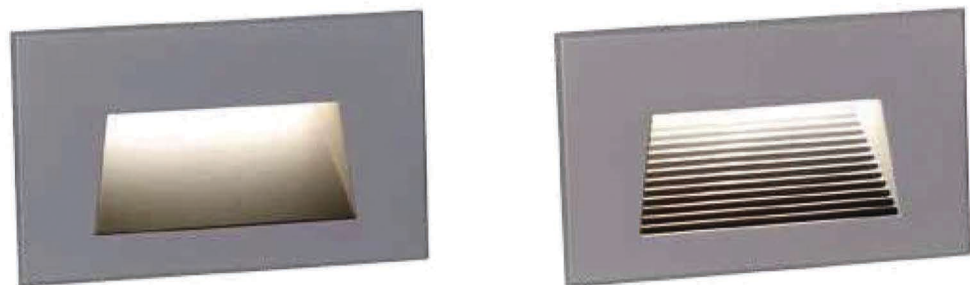


## LED COLOUR TEMPERATURE

2000K • 3000K • 6000K

## OUTER DIMENSIONS & ACCESSORIES

Unit:mm

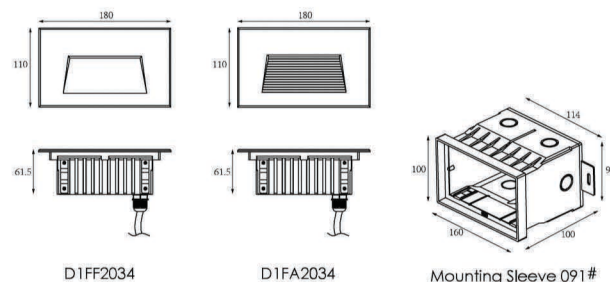

## OPTICS

N/A


## MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
FRONT COVER	12# Die-casting aluminum RAL7037 powder coated T=60-80um Adhesion of ISO class 1/ASTM class 4B
LED	1 SMD3030 type LED
CABLE GLAND	1 IP-67 copper and nicked coated
GASKET	1 Molding shaped silicone seal
LED DRIVER	1 Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	H05RN-F 2X1.0mm2 L=0.5m (low voltage) H05RN-F 3X1.0mm2 L=0.5m (high voltage)
MOUNTING SLEEVE	1 ABS 091#
DIMMABLE SUPPORT	1 Triac PWM 1-10V Dali

## TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
D1FA2034	20x0.2W	24V DC 120/240	24V = 227 120V = 102 240V = 57	24V = 5.6 120V = 6.8 240V = 6.8	Cool White = 103 Warm White = 96.5	10
D1FF2034	20x0.2W	24V DC 120/240	24V = 227 120V = 101 240V = 56	24V = 5.6 120V = 6.8 240V = 6.8	Cool White = 113.7 Warm White = 104.3	10

## PHOTOMETRIC CURVES

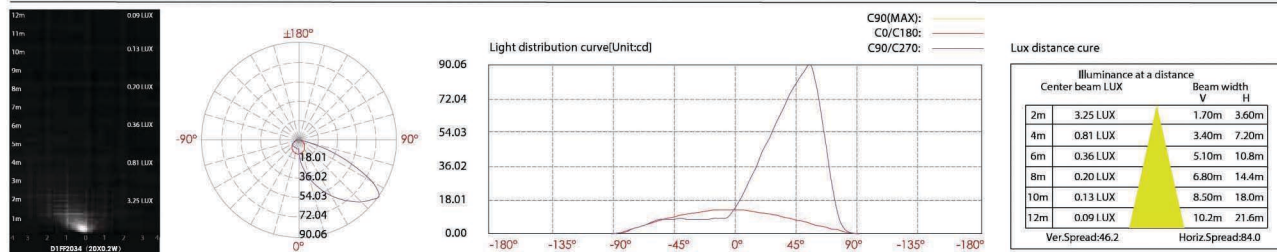

## FRONT COVER COLOR

### Basic



### Secondary



## MOUNTING SLEEVE CHARACTERISTIC



•The clips have been specially modified and upgraded to have a stronger structure in order to make up the absence of the screw fixing.



•There are two metal support plates on the bottom of the sleeve. It is used for fixing and preventing the mounting sleeve shifting while filling the concrete.  
•These will simply install and electrician while they are recessing the sleeves.