

Diffused Beam Recessed LED Wall Light

Stainless Steel Front Cover




LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

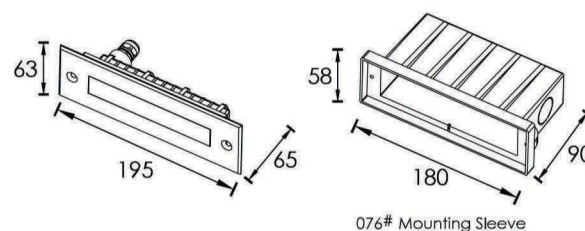

OPTICS

N/A

MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting grey powder coated aluminum T=60-80µm Adhesion of ISO class 1/ASTM class 4B
FRONT COVER	1 Hard chrome-plated stainless steel SUS 316L#
LIGHT WINDOW	1 Step tempered glass,T=8mm
CABLE GLAND	1 IP68 PG-9 PA66
GASKET	1 Tooling shaped seal
LED DRIVER	1 Constant Voltage Input,Constant Current Output
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	H05RN-F 2X1.0mm2 L=0.5m (low voltage) H05RN-F 3X1.0mm2 L=0.5m (high voltage)
MOUNTING SLEEVE	1 ABS 076#
DIMMABLE SUPPORT	1 Triac PWM 1-10V Dim

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
D1FL1014	10×SMD3030	120°	24V DC 120/240	24V = 114 120V = 55 240V = 32	24V = 2.7 120V = 3.5 240V = 3.6	Cool White = 34 Warm White = 35	09

PHOTOMETRIC CURVES

