

Recessed LED Stair Light & Wall Light

LED COLOUR TEMPERATURE


2000K · 3000K · 6000K

OPTICS

N/A

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

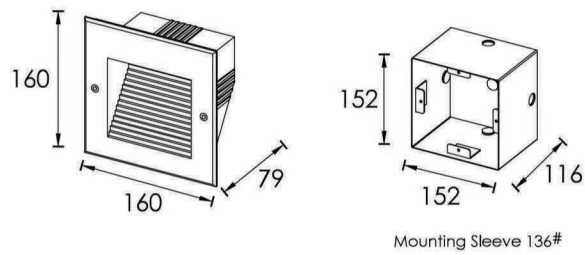

FRONT COVER COLOR

Basic



Sanded Dark Grey
KAP 7037

Secondary



Silver Grey
KAP 9022



Sanded Black
RAL9005

MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
FRONT COVER	12# Die-casting aluminum PT877U powder coated T=20-30um.Adhesion of ISO class 1/ASTM class 4B
LED	1 SMD2835 type power LED
CABLE GLAND	IP67 copper and nicked coated
GASKET	1 Molding shaped silicone seal
LED DRIVER	1 Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	H05RN-F 2X1.0mm2 L=0.5m (low voltage) H05RN-F 3X1.0mm2 L=0.5m (high voltage)
MOUNTING SLEEVE	ID1G1807:Zinc-coated steel 136#
DIMMABLE SUPPORT	1 Triac PWM 1-10V Dali

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
D1G1807	18×SMD2835	120°	24V DC 120/240	24V = 50 120V = 27 240V = 17	24V = 1.2 120V = 1.7 240V = 1.8	Cool White = 39 Warm White = 34	10

PHOTOMETRIC CURVES

