

# Recessed LED Wall Recessed Outline Light



## LED COLOUR TEMPERATURE


2000K · 3000K · 6000K

## OPTICS

N/A

## OUTER DIMENSIONS & ACCESSORIES

Unit:mm

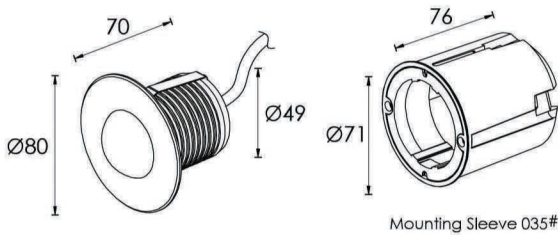

## MATERIAL SPECIFICATIONS

- HOUSING** | 12# Die-casting grey powder coated aluminum  
T=60-80µm Adhesion of ISO class 1/ASTM class 4B
- FRONT RING** | Hard chrome-plated Staines steel SUS 316#
- LENS** | Optical Glass
- OPERATING TEMPERATURE** | -20°C~40°C
- WATERPROOF SEAL** | Rubber seal
- MOUNTING SLEEVE** | ABS 035#
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali






## MOUNTING SLEEVE CHARACTERISTIC



## TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
<b>D1UA0102</b>	1×3W	L0145F042KP	45°	24V DC 120/240	24V = 110 120V = 48 240V = 28	24V = 2.6 120V = 3.1 240V = 3	Cool White = 31 Warm White = 27	09

## PHOTOMETRIC CURVES

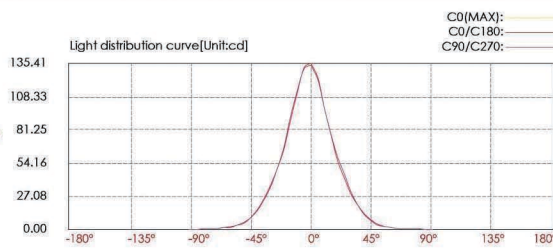

Lux distance curve

Illuminance at a distance

Center beam LUX	Beam width V	Beam width H
2m 33.85 LUX	1.4m	1.3m
4m 8.46 LUX	2.7m	2.7m
6m 3.76 LUX	4.1m	4.0m
8m 2.12 LUX	5.5m	5.3m
10m 1.35 LUX	6.9m	6.7m
12m 0.94 LUX	8.2m	8.0m

Ver.Spread:37.9 Hertz.Spread:36.9