


# Beam Effect Wall Mounting Landscape Light



## LED COLOUR TEMPERATURE


3000K - 6000K

## OPTICS



## OUTER DIMENSIONS & ACCESSORIES

Unit:mm

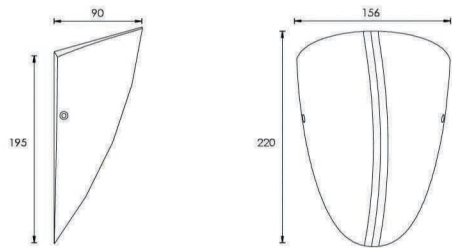


## MATERIAL SPECIFICATIONS

<b>HOUSING</b>	12# Die-casting dark grey powder coated aluminum T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
<b>FRONT COVER</b>	12# Die-casting aluminum
<b>LIGHT WINDOW</b>	Tempered glass, T=3.5mm
<b>LED</b>	NICHIA
<b>LED DRIVER</b>	Constant Voltage Input, Constant Current Output
<b>OPERATING TEMPERATURE</b>	-20°C~40°C
<b>POWER CABLE</b>	H05RN-F 2X1.0mm <sup>2</sup> L=0.3m (low voltage)   H05RN-F 3X1.0mm <sup>2</sup> L=0.3m (High voltage)


## TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
<b>B7BC0166</b>	1×6W	B59	10°	120/240	120V = 108 240V = 61	120V = 7.8 240V = 8.3	Cool White = 500 Warm White = 444	05

## PHOTOMETRIC CURVES

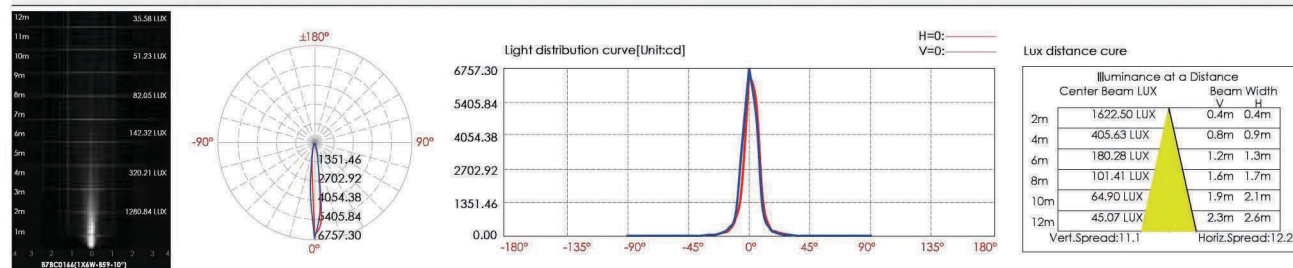

Above diagram effect shows a real simulation based on IES result and optical testing basis

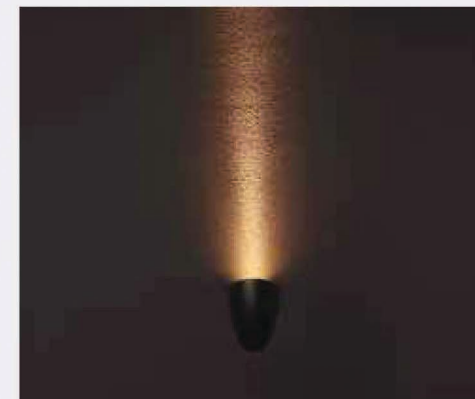

## HOUSING COLOR OPTION



Sanded Brown  
RAL 8019

Sanded Black  
RAL 9005

Sanded White  
RAL 9003