

Wall Mounting Ceiling Down Light




LED COLOUR TEMPERATURE

3000K · 6000K

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

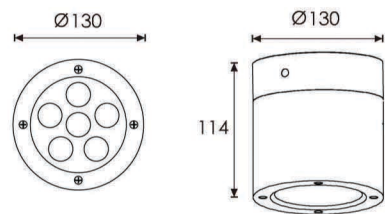

MATERIAL SPECIFICATIONS

- HOUSING MATERIAL** | Extruded aluminum alloy #6063
- PAINTING** | Powder coating ,T= 60~80 um./Adhesion of ISO class 1/ASTM class 4B
- REFLECTOR** | Optical reflector. efficiency≥85%
- LED** | NICHIA
- POWER CABLE** | H05RN-F 2X1.0mm2 L=0.3m(low voltage)
| H05RN-F 3X1.0mm2 L=0.3m(High voltage)
- OPERATING TEMPERATURE** | -20°C~40°C


OPTICS



TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BBCJ0657	6×2W	B33D	30°	24V DC 120/240	24V = 562 120V = 100 240V = 56	24V = 13.5 120V = 12 240V = 12.2	Cool White = 830 Warm White = 681	06

PHOTOMETRIC CURVES

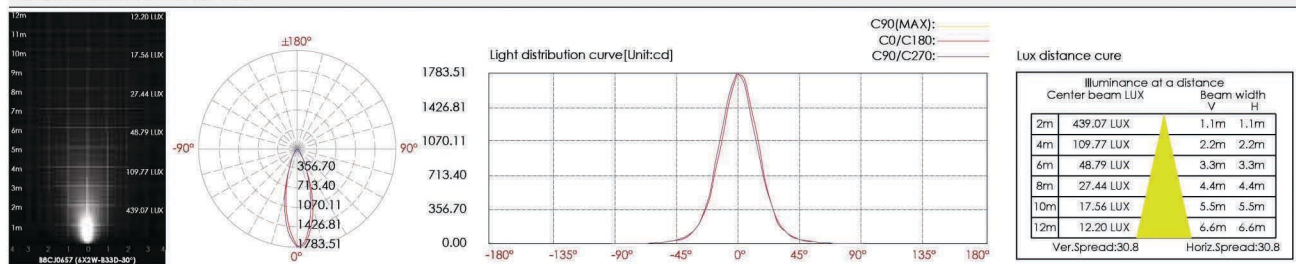

Beam Effect Demo

HOUSING COLOR OPTION

