

Wall Mounting Landscape Light




Single Side

LED COLOUR TEMPERATURE

3000K · 6000K

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

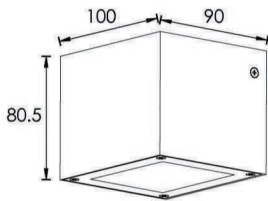

OPTICS



R5



18°

R0118C044XL



25°

R0125C044XL



40°

R0140C044XL

MATERIAL SPECIFICATIONS

- HOUSING** | 12# Die-casting dark grey powder coated aluminum
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
- LIGHT WINDOW** | PC T=6mm
- GASKET** | Tooling shaped seal
- DRIVER** | 1 Main voltage 100V-240V driver inside builded
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 2×1.0mm2 L=0.3m (low voltage)
H05RN-F 3×1.0mm2 L=0.3m (high voltage)

HOUSING COLOR OPTION



Sanded Brown
RAL 8019



Sanded Black
RAL 9005






Sanded White
RAL 9003

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
R7AF0126	1×6W COB	R5	25°	24V DC 120/240	24V = 270 120V = 65 240V = 37	24V = 6.5 120V = 7.7 240V = 7.8	Cool White = 745 Warm White = 651	06

PHOTOMETRIC CURVES

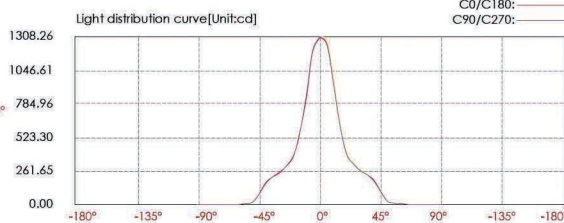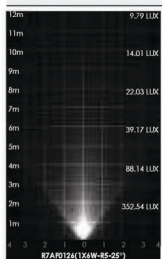

Distance (m)	Center beam LUX	Beam width (m)
2m	324.84 LUX	1.0m 1.0m
4m	81.21 LUX	1.9m 1.9m
6m	36.09 LUX	2.9m 2.9m
8m	20.30 LUX	3.8m 3.8m
10m	12.29 LUX	4.8m 4.8m
12m	9.02 LUX	5.8m 5.7m