


Wall Mounting Landscape Light



LED COLOUR TEMPERATURE


3000K · 6000K

OPTICS

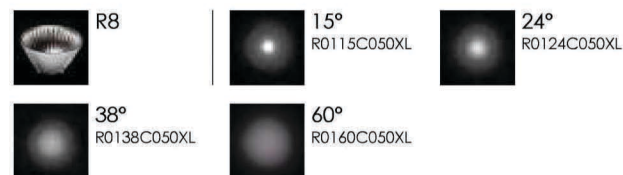

OUTER DIMENSIONS & ACCESSORIES

Unit:mm






MATERIAL SPECIFICATIONS

- HOUSING** | 12# Die-casting dark grey powder coated aluminum
T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
- OPTICAL REFLECTOR** | Optical reflector efficiency ≥ 85%
- LIGHT WINDOW** | Tempered glass, T=4mm
- LED** | NICHIA
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 2X1.0mm² L=0.3m (low voltage)
H05RN-F 3X1.0mm² L=0.3m (High voltage)
- MOUNTING BASE** | casting aluminum

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)
R7XB0227	2×8W COB	R8	24°	24V DC 120/240	24V = 822 120V = 182 240V = 103	24V = 19.7 120V = 21 240V = 21	Cool White = 932×2 Warm White = 845×2

PHOTOMETRIC CURVES

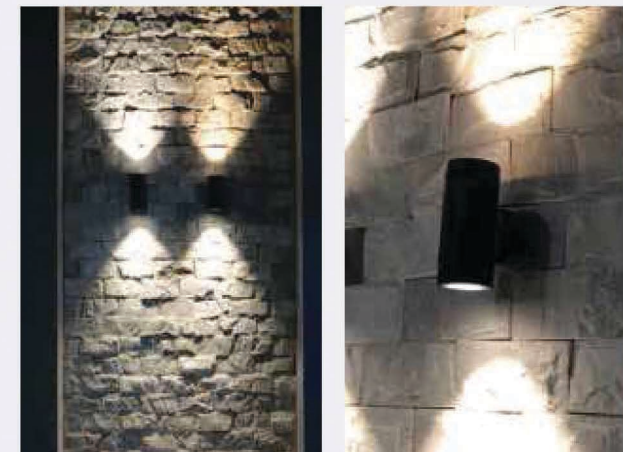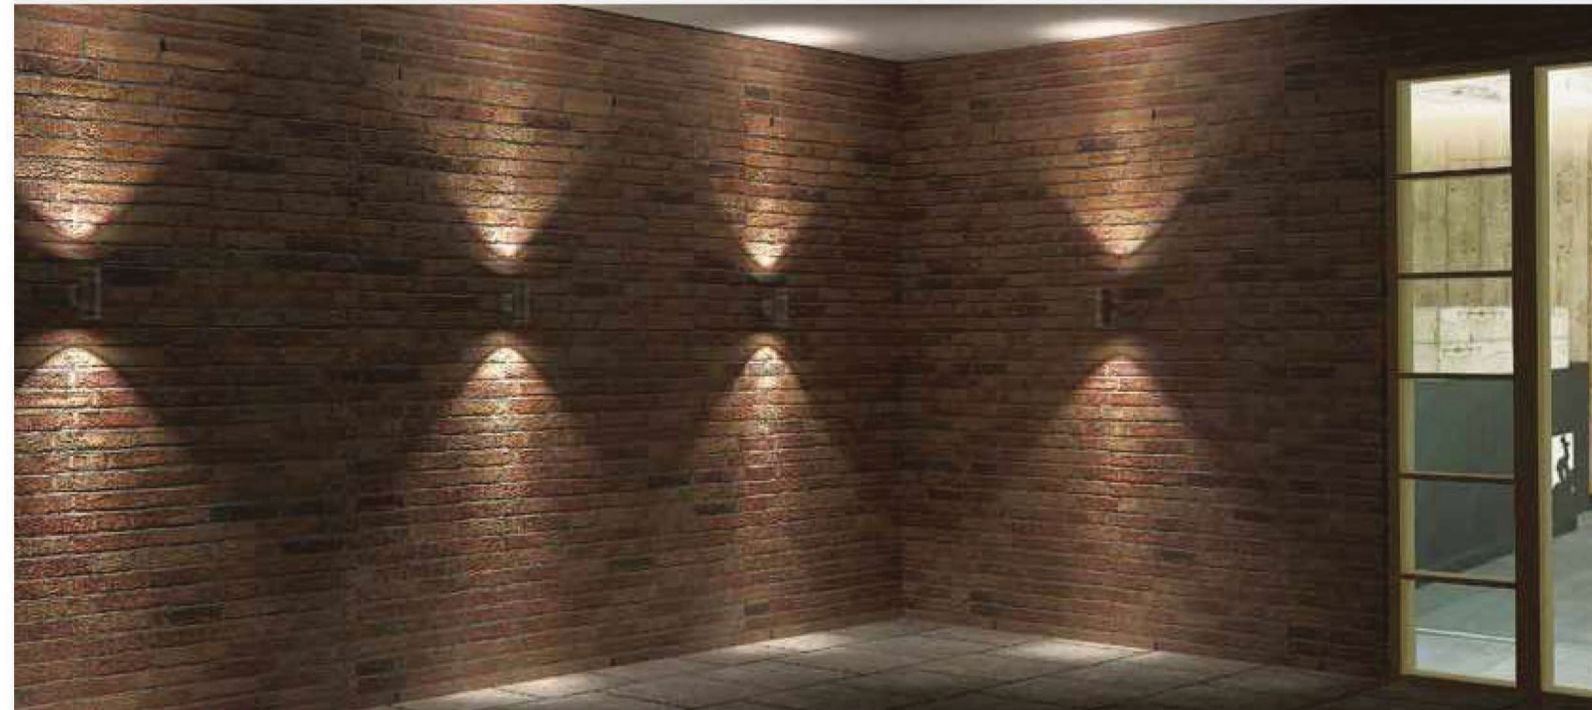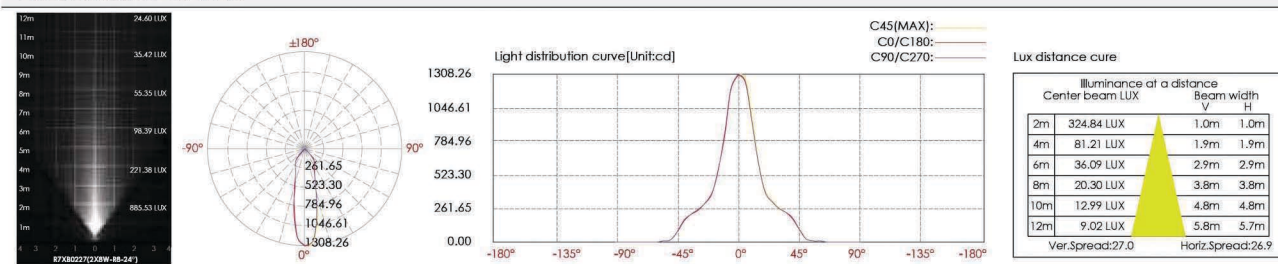

HOUSING COLOR OPTION



Sanded Brown
RAL 8019

Sanded Black
RAL 9005

Sanded White
RAL 9003