

# COB Wall Mounting Ceiling Down Light




### LED COLOUR TEMPERATURE

3000K · 6000K

### OUTER DIMENSIONS & ACCESSORIES

Unit:mm

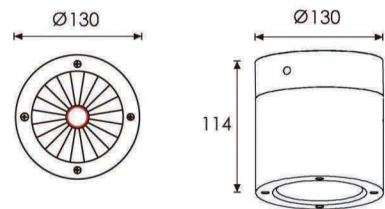

### OPTICS




### MATERIAL SPECIFICATIONS

- HOUSING MATERIAL** | Extruded aluminum alloy #6063
- PAINTING** | Powder coating, T= 60-80 um./Adhesion of ISO class 1/ASTM class 4B
- REFLECTOR** | Optical reflector. efficiency≥85%
- LED** | INICHIA
- POWER CABLE** | H05RN-F 2X1.0mm<sup>2</sup> L=0.3m(low voltage)  
H05RN-F 3X1.0mm<sup>2</sup> L=0.3m(High voltage)
- OPERATING TEMPERATURE** | -20°C~40°C

### TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
<b>R8CJ0127</b>	1×8W COB	R27	35°	24V DC 120/240	24V = 411 120V = 88 240V = 50	24V = 9.8 120V = 10.8 240V = 10.8	Cool White = 850 Warm White = 896	06

### PHOTOMETRIC CURVES

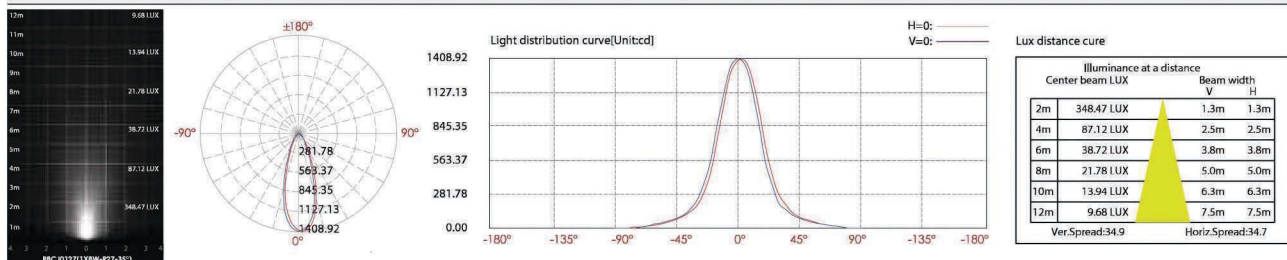

Beam Effect demo

### HOUSING COLOR OPTION



Dark Grey  
RAL 7037

Sanded White  
RAL 9003

Sanded Black  
RAL9005