


# Wall Mounting Ceiling Down Light

## OPTICS



## OUTER DIMENSIONS & ACCESSORIES

Unit:mm

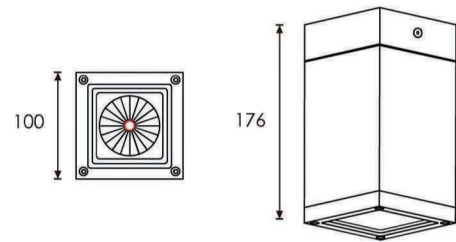

## MATERIAL SPECIFICATIONS

- HOUSING MATERIAL** | Extruded aluminum alloy #6063
- PAINTING** | Powder coating ,T= 60~80 um./Adhesion of ISO class 1/ASTM class 4B
- REFLECTOR** | Optical reflector, efficiency≥85%
- LED** | NICHIA
- POWER CABLE** | H05RN-F 2X1.0mm<sup>2</sup> L=0.3m(low voltage)  
| H05RN-F 3X1.0mm<sup>2</sup> L=0.3m(High voltage)
- OPERATING TEMPERATURE** | -20°C~40°C

## HOUSING COLOR OPTION



## LED COLOUR TEMPERATURE

3000K - 6000K

## TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
<b>R8VA0170</b>	1×18W COB	R17	18°	24V DC 120/240	24V = 833 120V = 178 240V = 96	24V = 20 120V = 20 240V = 21	Cool White = 1766 Warm White = 1705	06

## PHOTOMETRIC CURVES

