

# Central Ejective RGBW LED Fountain Light

Completely Stainless Steel SUS 316#&316L Housing & Accessories



## OPTICS




B48



30°  
L0130D020KP

## OUTER DIMENSIONS & ACCESSORIES

Unit:mm



**•Warning :** Must be installed under the water to prevent the light from being burnt off because of over-heating.

## LED WAVE LENGTH

- R = 620-630 nm
- G = 520-530 nm
- B = 460-470 nm
- W = 6000K




## MATERIAL SPECIFICATIONS

- HOUSING** | Hard chromeplated Molding shaped stainless steel SUS 316L\*
- FRONT COVER** | Hard chromeplated Stainless steel sus 316L\*
- LIGHT WINDOW** | Step tempered glass.T=8mm
- GASKET** | Silicone Gasket
- CABLE GLAND** | IP68 PG-11 copper with nickel-coated
- PCB** | Excellent heat conductivity aluminum coefficient of heat Conductivity≥2.0w/mk
- LED DRIVER** | Constant Voltage Input.Constant Current Output
- POWER CABLE** | H05RR-F 5X0.75mm<sup>2</sup> L=3.0m
- BUILT-IN OVERHEAT SENSOR SYSTEM** | Automatic Shutdown at 75°C
- APPLICATION ENVIRONMENT** | Temperature of water between -20°C~40°C less than 1 meter depth

## TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
<b>B4SB0619</b>	6×3W RGBW 4in1 Full color	B48	30°	24V DC	1012	24.3	758	09

## PHOTOMETRIC CURVES

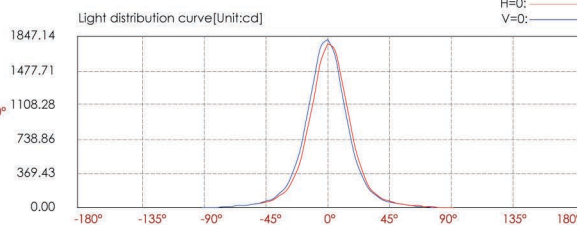

Center beam LUX	Beam width V	Beam width H
442.81 LUX	1.1m	1.1m
110.7 LUX	2.1m	2.1m
49.2 LUX	3.2m	3.2m
27.68 LUX	4.2m	4.3m
17.71 LUX	5.3m	5.4m
12.3 LUX	6.3m	6.4m

Ver.Spread:29.7 Horiz.Spread:30.1