

# Central Ejective RGBW LED Fountain Light

Completely Stainless Steel SUS 316# Housing & Accessories



Overheat Sensor Inside  2.6KG

### OPTICS




### LED WAVE LENGTH

- R = 620-630 nm
- G = 520-530 nm
- B = 460-470 nm
- W = 6000K

### OUTER DIMENSIONS & ACCESSORIES

Unit:mm




### MATERIAL SPECIFICATIONS

- HOUSING** | Hard chromeplated Molding shaped stainless steel SUS 316L\*
- LIGHT WINDOW** | Step tempered glass,T=10mm
- GASKET** | EPDM gasket
- CABLE GLAND** | IP68 PG-11 copper with nickel-coated
- LED** | SMD 3535 RGBW 4 IN 1
- PCB** | Excellent heat conductivity aluminum,coefficient of heat Conductivity≥2.0w/mk
- LED DRIVER** | Constant Voltage Input,Constant Current Output
- POWER CABLE** | H05RR-F 5X0.75mm<sup>2</sup> L=3.0m
- BUILT-IN OVERHEAT SENSOR SYSTEM** | Automatic Shutdown at 75°C
- APPLICATION ENVIRONMENT** | Temperature of water between -20°C~40°C less than 1 meter depth

### TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
<b>B4TB1219</b>	12x3W RGBW 4in1 Full color	B49	30°	24V DC	1425	34.2	1366	09

### PHOTOMETRIC CURVES

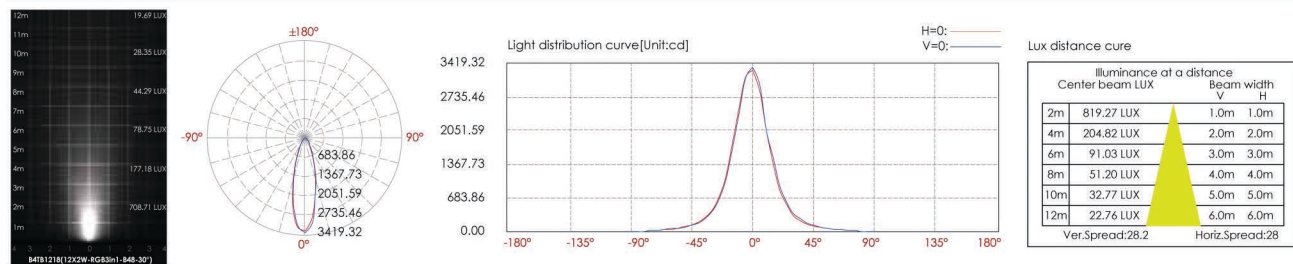

Water jet pipe G1/2"taper

**Warning :** Must be installed under the water to prevent the light from being burnt off because of over-heating.

