

Slim Type RGBW LED Linear Wall Washer

4 Colors in one LED Solution



OPTICS




LED WAVE LENGTH

- R = 620-630 nm
- G = 520-530 nm
- B = 460-470 nm
- W = 6000K

OUTER DIMENSIONS & ACCESSORIES

Unit:mm


Low voltage input (24VDC)

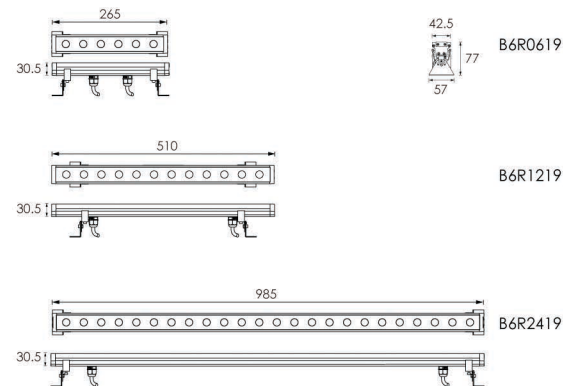


MATERIAL SPECIFICATIONS

- HOUSING** | Extruded aluminum, powder coated
- LENS** | Optical lens, efficiency ≥ 85%
- LIGHT WINDOW** | Step tempered glass, T=4mm
- CABLE GLAND** | IP68 PG-9 PA66
- GASKET** | Glass and housing are silicone sealed
- LED** | SMD 3535 RGBW 4 IN 1
- OPERATING TEMPERATURE** | -20°C ~ 40°C
- BRACKET** | Hard chrome plated stainless steel SUS 316L T=1.5mm
- POWER CABLE** | 2XH05RR-F 5X0.75mm² L=0.5m


Low voltage input (24VDC) power cord model

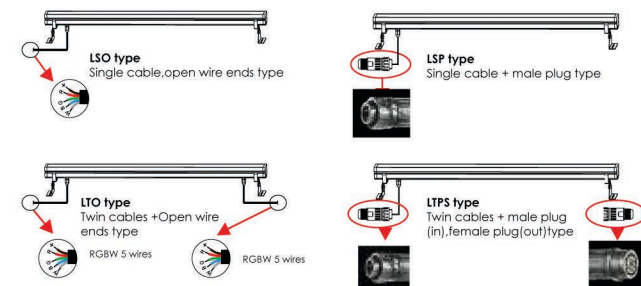

• Cap-Optional Accessory



• Air Valve

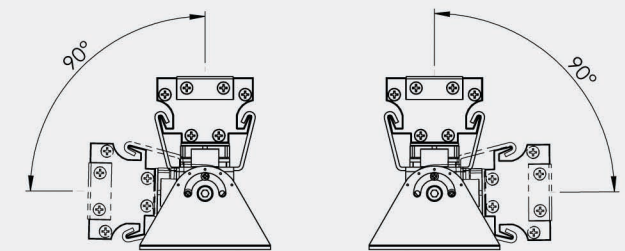

• Adjustable beam direction

TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°) Ø1/2	LENGTH(MM)	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
B6R0619	6×2W RGBW 4in1 Full color	B48	30°	265	24V DC	513	12.3	528	02
B6R1219	12×2W RGBW 4in1 Full color	B48	30°	510	24V DC	1020	24.4	1082	02
B6R2419	24×2W RGBW 4in1 Full color	B48	30°	985	24V DC	2008	48.2	2139	02