


Soft light Recessed Wooden Floor Light



D2XBR2443



D2XBS2443

LED Wave Length

R = 620-630 nm
G = 520-530 nm
B = 460-470 nm
W = 6000K

Optics

N/A

Installation Diagram


low voltage



A: Minimum space for external driver is 48mm

Outer Dimensions




Unit:mm

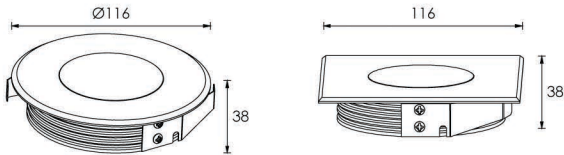

Material Specifications

Housing	12" Die-casting dark grey powder coated aluminum. T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
Front ring	Hard chromeplated stainless steel SUS 316L [®]
Light Window	Tempered frosted step glass.T=8mm
Glass pressure capacity	Full area=3370kgs
Operating temperature	-20°C~40°C
Power Cable	H05RN-F 5X0.5mm ² L=0.5m
Dimmable Support	Triac PWM 1-10V Dali

Item	Light source	Lens	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
D2XBR2443	24×RGBW (6R 6G 6B 6W)		—	24V DC	R=17 B=17 G=18 W=17	1.7	6.6	08
D2XBS2443	24×RGBW (6R 6G 6B 6W)		—	24V DC	R=17 B=17 G=18 W=17	1.7	6.6	08

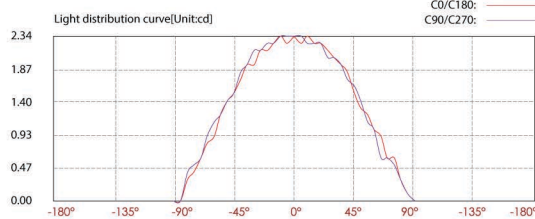

C0(MAX):
C0/C180:
C90/C270:

Lux distance curve

Illuminance at a distance		Beam width	
Center beam LUX	Beam width V	H	
2m 0.58 LUX	5.90m	5.80m	
4m 0.15 LUX	11.8m	11.5m	
6m 0.06 LUX	17.7m	17.3m	
8m 0.04 LUX	23.5m	23.1m	
10m 0.02 LUX	29.4m	28.8m	
12m 0.02 LUX	35.3m	34.8m	

Ver.Spread:111.7 Horiz.Spread:110.5