

Architectural & Landscape RGBW LED Spot Light




OPTICS



OUTER DIMENSIONS & ACCESSORIES

Unit:mm

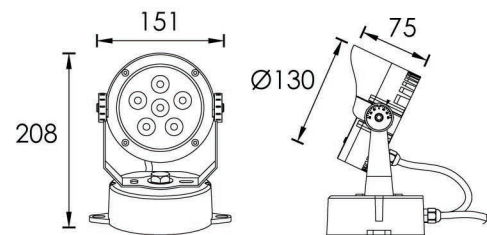

HOUSING COLOR OPTION

Basic



Sanded Dark Grey
KAP 7037

Secondary



Silver Resistant Paint
RAL 9006



Sanded Black
RAL9005

LED WAVE LENGTH

- R = 620-630 nm
- G = 520-530 nm
- B = 460-470 nm
- W = 6000K

MATERIAL SPECIFICATIONS

- HOUSING** | 12" Die-casting dark grey powder coated aluminum
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
- LENS** | All-in-one optical lens, efficiency ≥ 85%
- LIGHT WINDOW** | Tempered glass, T=4mm
- CABLE GLAND** | IP68 PG-9 PA66
- LED** | SMD3535 RGBW 4 IN1 LED
- GASKET** | Tooling shaped seal
- BRACKET** | Steel aluminum
- POWER CABLE** | H05RR-F 5X0.75mm² L=2.0m



TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
FB3BCM0619	6×3W RGBW 4in1 Full color	B49	30°	24V DC	954	22.9	782	08

PHOTOMETRIC CURVES

