



LED CEILING DOWNLIGHT SERIES

It's made up of mini grilles alternate the intermediate module to make completely symmetrical light and partial asymmetrical combination with Bluetooth controller alluminaries.

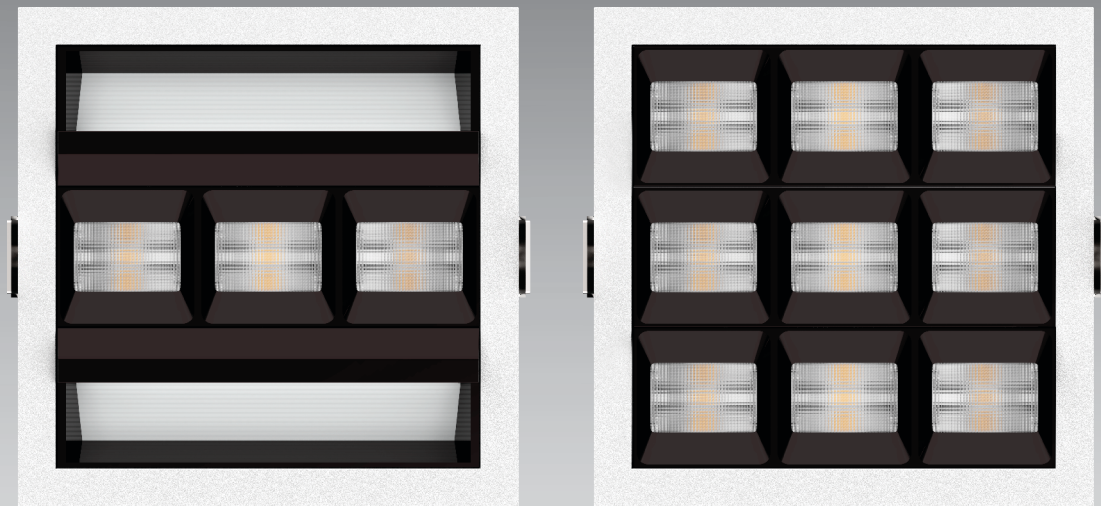


using bluetooth controller
App store: allumin

Configuration



2 X wallwasher


3 X symmetrical




9 X symmetrical

FS5206 SERIES

Color selection
B **S** **W**

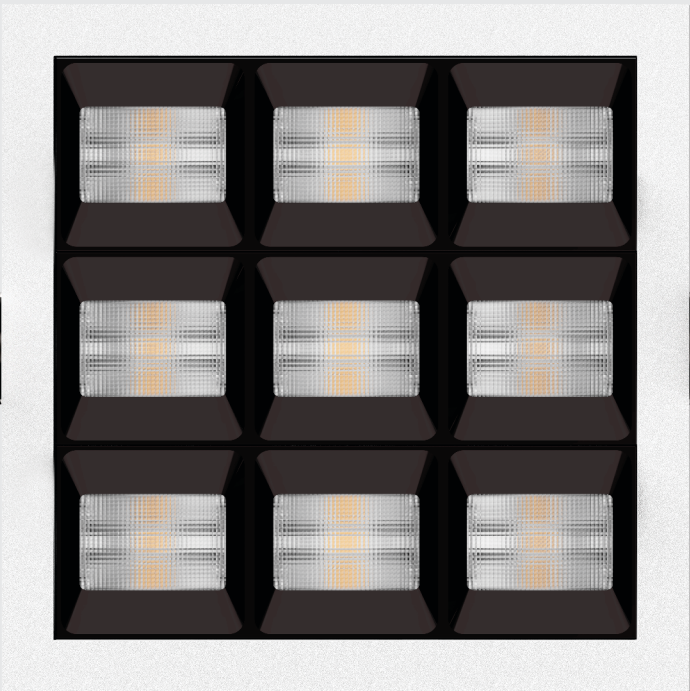

FS5206-40



	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5206-40 Max.40W	40W	DC1500mA	2700K	2815lm	CRI90	-30°C+40°C
	40W	DC1500mA	3000K	3120lm	CRI90	-30°C+40°C
	40W	DC1500mA	4000K	3520lm	CRI80	-30°C+40°C
	40W	DC1500mA	5000K	3925lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac

