

Strong Load Bearing Capacity

LED Drive-Over Light/Stainless Steel Front Cover



LED COLOUR TEMPERATURE


2000K • 3000K • 6000K

OPTICS

N/A

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

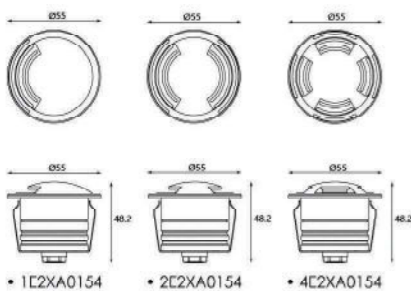

MATERIAL SPECIFICATIONS


- HOUSING** | 12# Die-casting dark grey powder coated aluminum
T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
- FRONT COVER** | Hard chrome plated stainless steel SUS 316#
- LOADING CAPACITY** | >2000kg
- GASKET** | Molding shaped silicone seal
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 2X1.0mm² L=0.5m
- MOUNTING SLEEVE** | 062# ABS plastic
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali



TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
1E2XA0154	1x2W	24V DC	24V = 110	24V = 2.6	Cool White = 1.5 Warm White = 1.3	10
2E2XA0154	1x2W	24V DC	24V = 110	24V = 2.6	Cool White = 2 Warm White = 1.7	10
4E2XA0154	1x2W	24V DC	24V = 110	24V = 2.6	Cool White = 2 Warm White = 1.7	10

PHOTOMETRIC CURVES

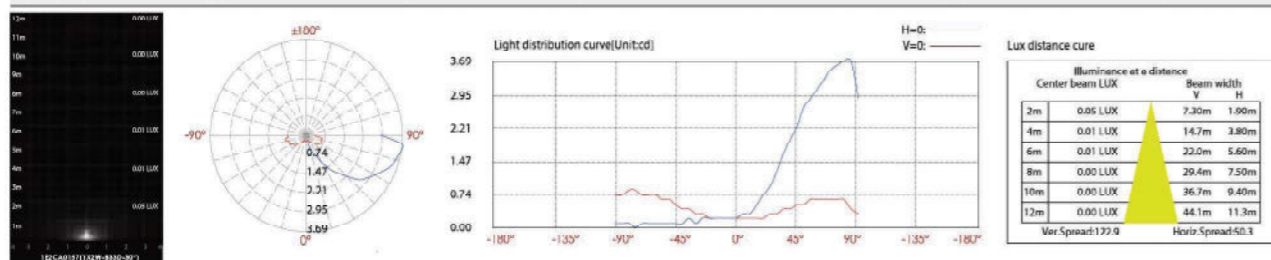

INSTALLATION DIAGRAM



A: Minimum space for external driver is 48mm

PHOTOMETRIC CURVES

