

Strong Load Bearing Capacity

LED Drive-Over Light/Stainless Steel Front Cover



LED COLOUR TEMPERATURE


2000K • 3000K • 6000K

OPTICS

N/A

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

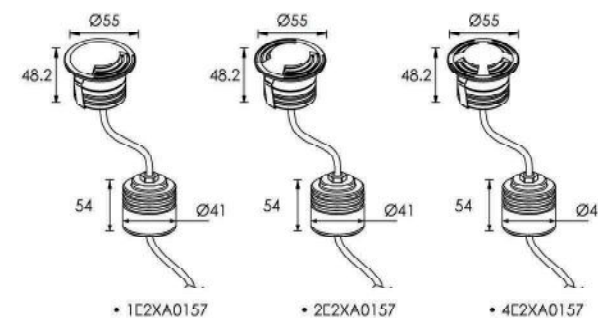

MATERIAL SPECIFICATIONS

HOUSING 12# Die-casting dark grey powder coated aluminum

T=60-80µm, Adhesion of ISO class 1/ASTM class 4B

FRONT COVER 11# Hard chrome plated stainless steel SUS 316#

LOADING CAPACITY 1 >2000kg

GASKET 1 Molding shaped silicone seal

OPERATING TEMPERATURE 1 -20°C~40°C

POWER CABLE 1 HQSRN-F 2X1.0mm² L=0.5m


MOUNTING SLEEVE 1 062# ABS plastic




TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
1E2XA0157	1x2W	24V DC	24V = 108	24V = 2.5	Cool White = 1.5 Warm White = 1.3	10
		120V/240	120V = 47	120V = 3		
		240V = 28	240V = 3	240V = 3		
2E2XA0157	1x2W	24V DC	24V = 108	24V = 2.5	Cool White = 2 Warm White = 1.7	10
		120V/240	120V = 47	120V = 3		
		240V = 28	240V = 3	240V = 3		
4E2XA0157	1x2W	24V DC	24V = 108	24V = 2.5	Cool White = 2 Warm White = 1.7	10
		120V/240	120V = 47	120V = 3		
		240V = 28	240V = 3	240V = 3		

PHOTOMETRIC CURVES

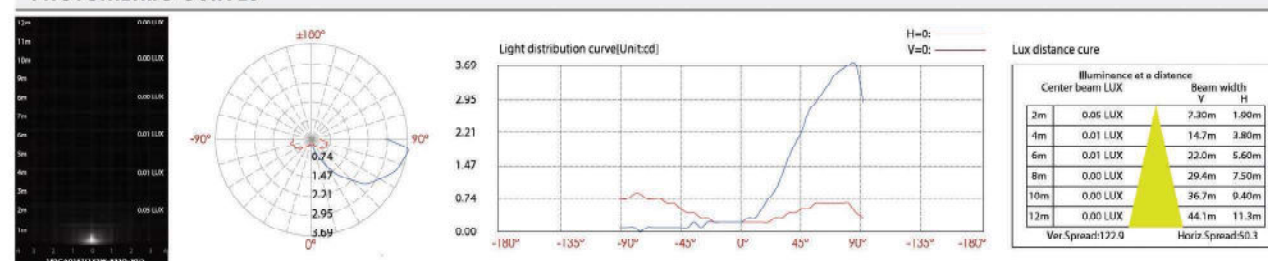

PHOTOMETRIC CURVES

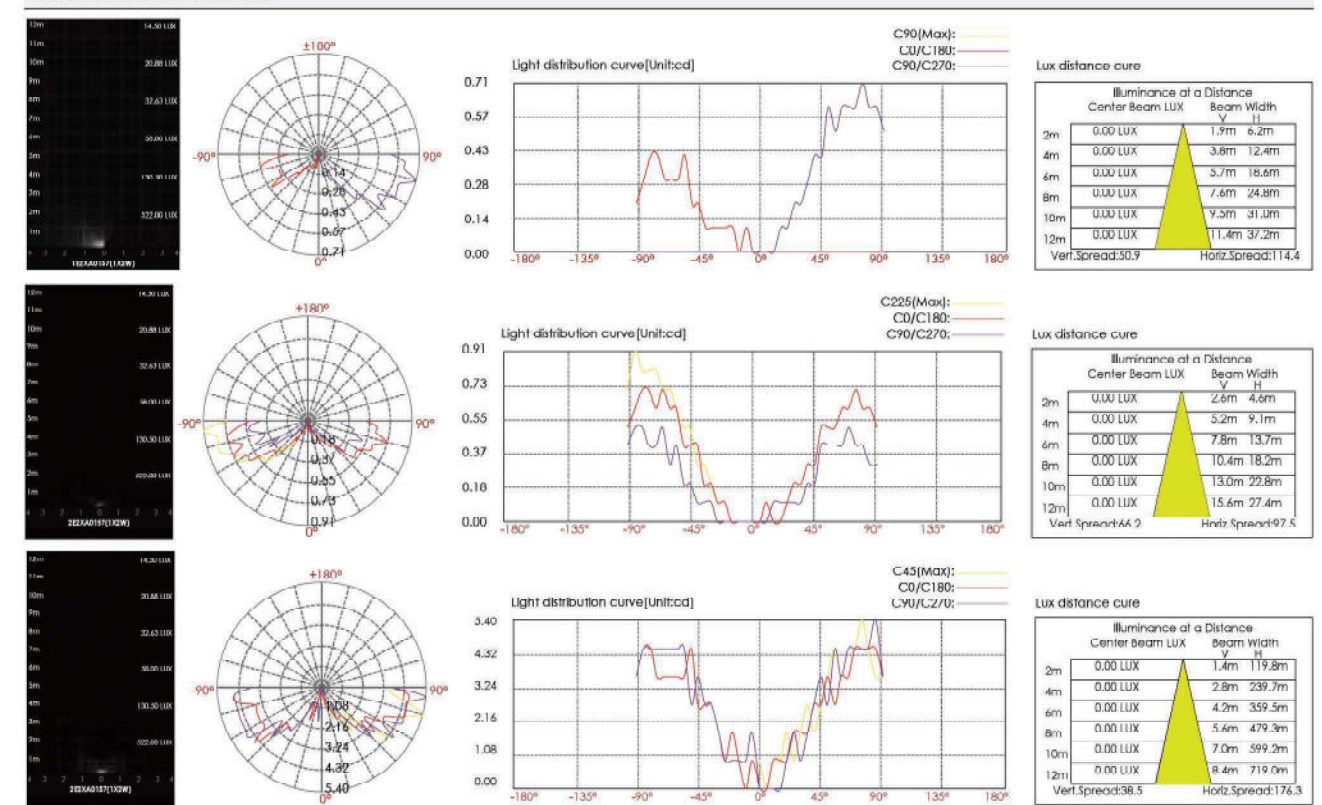

INSTALLATION DIAGRAM



A: Minimum space for external driver is 48mm
B: IP67 120V/240V/24V external input driver