

Strong Load Bearing Capacity

LED Drive-Over Light/Stainless Steel Front Cover



LED COLOUR TEMPERATURE


2000K • 3000K • 6000K

OPTICS


N/A

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

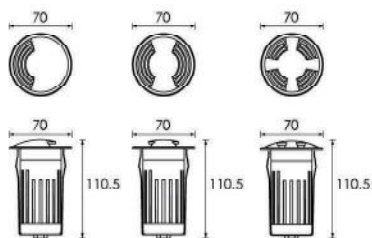

• 1E2CA0157 A • 2E2CA0157 A • 4E2CA0157 A



Mounting Sleeve 065#



MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting dark grey powder coated aluminum T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
FRONT COVER	1 Hard chromeplated stainless steel SUS 316#
LOADING CAPACITY	1 >2000kg
GASKET	1 Molding shaped silicone seal
OPERATING TEMPERATURE	1 -20°C~40°C
POWER CABLE	1 H05RN-F 2X1.0mm ² L=0.5m (low voltage) 1 H05RN-F 3X1.0mm ² L=0.5m (high voltage)
MOUNTING SLEEVE	1 065# ABS plastic
DIMMABLE SUPPORT	1 Triac: PWM 1-10V 1ball

TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
1E2CA0157 A	1×2W	24V DC 120/240	24V = 108 120V = 47 240V = 28	24V = 2.5 120V = 3 240V = 3	Cool White = 4.8 Warm White = 4.3	10
2E2CA0157 A	1×2W	24V DC 120/240	24V = 108 120V = 47 240V = 28	24V = 2.5 120V = 3 240V = 3	Cool White = 4.8 Warm White = 4.3	10
4E2CA0157 A	1×2W	24V DC 120/240	24V = 108 120V = 47 240V = 28	24V = 2.5 120V = 3 240V = 3	Cool White = 4.8 Warm White = 4.3	10

PHOTOMETRIC CURVES

