

Asymmetrical COB Inground Wall Washer & Recessed Wall Light



LED COLOUR TEMPERATURE

3000K · 5000K

OPTICS



R24
R0130C023RD 30°




R24
30°

MATERIAL SPECIFICATIONS


Housing	12# Die-casting grey powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Light Window	Step tempered glass, T=4mm
Glass pressure capacity	Full area=5373kgs
Reflector	Optical Reflector efficiency≥90%
Gasket	Molding shaped silicone seal
LED	Multi chip on board LED
LED Driver	Constant Voltage Input, Constant Current Output
Operating temperature	-20°C ~40°C
Power cable	24V: Input: H05RN-F 2×1.0mm² L=0.5M (low voltage) 100/240V: H05RN-F 3×1.0mm² L=0.5M (high voltage)
Mounting sleeve	ABS 085#

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

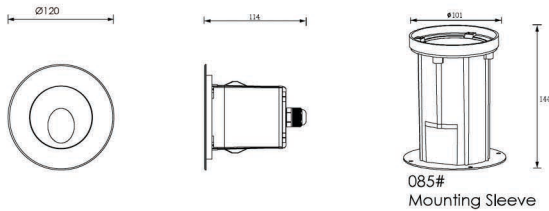

ASYMMETRICAL DEMO

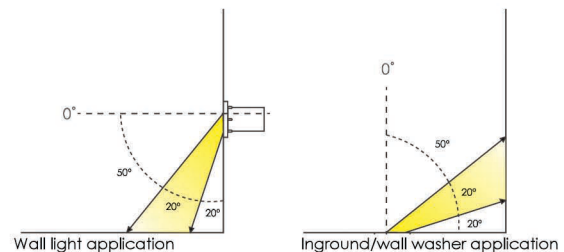

TECHNICAL DATA

Item	Light source	Reflector	The manufacturer selected lens degree(°)θ1/2	Input voltage(V)	Typical operating current(mA)	Typical consumption(W)	Typical luminance(lm)	IK rate
RC2CPT0125	1X5W COB	R24	30°	24V DC 120/240	2 4 V= 233 120V= 49 240V= 31	2 4 V=5.6 120V=5.8 240V=6.4	Cool white=375 Warm white=355	06

PHOTOMETRIC CURVES

