

Recessed Linear Beam Inground Wall Washer Lamp



LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

OPTICS



B27




8x30°

L0 15° D021YM
32°

OUTER DIMENSIONS & ACCESSORIES


Unit:mm

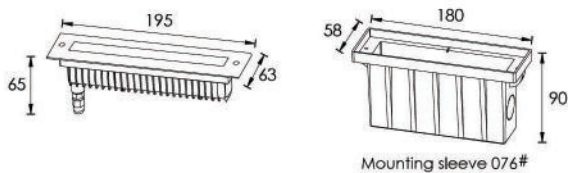

MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting dark grey powder coated aluminum, T=60-80μm
FRONT COVER	I Hard chrome plated stainless steel SUS 316L#
LIGHT WINDOW	I Step tempered glass, T=8mm
CABLE GLAND	I IP68 PG-9 PA66
GLASS PRESSURE CAPACITY	I Full area=3251kgs
GASKET	I Molding shaped silicone seal
PCB	I Excellent heat conductivity aluminum, coefficient of heat Conductivity≥2.0w/mk
LED DRIVER	I Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	I -20°C~40°C
POWER CABLE	I H05RN-F 2X1.0mm ² L=0.5m (low voltage) I H05RN-F 3X1.0mm ² L=0.5m (high voltage)
MOUNTING SLEEVE	I ABS 076#
DIMMABLE SUPPORT	I Triac PWM 1-10V Dali

MOUNTING SLEEVE CHARACTERISTIC



- The right picture – the supporting plate "A" is used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A" from the mounting sleeve before the lamp installation.

Low voltage type



Outside gear box for high voltage



TECHNICAL DATA

ITEM	LIGHT SOURCE	LENS	LENS DEGREE(°)Ø1/2	WEIGHT (KG)	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
S2FL0357	3x2W	B27	8x30°	0.9	24V DC 120/240	24V = 37 120V = 89 240V = 46	24V = 5.7 120V = 6.2 240V = 5.7	Cool White = 457 Warm White = 360	08

PHOTOMETRIC CURVES

