


Recessed Wooden Floor Light

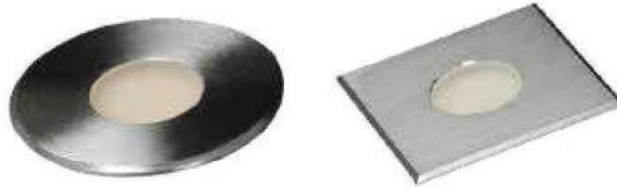


LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

OUTER DIMENSIONS & ACCESSORIES

Unit:mm

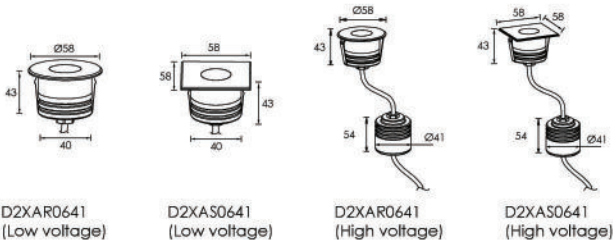

OPTICS

N/A

MATERIAL SPECIFICATIONS

HOUSING	12# Die-casting dark grey powder coated aluminum T=60-80µm, Adhesion of ISO class 1/ASTM class 4B
FRONT RING	Hard chromeplated stainless steel SUS 316#
LIGHT WINDOW	Tempered frosted step glass, T=7mm
GLASS PRESSURE CAPACITY	Full area=1106kgs
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	H05RN-F 2X1.0mm ² L=0.5m (low voltage) H05RN-F 3X1.0mm ² L=0.5m (high voltage)
DIMMABLE SUPPORT	Triac PWM 1-10V Dim

INSTALLATION DIAGRAM



A: Minimum space for external driver is 48mm
B: IP67 120V/240V/24V&RGB 24V external input driver

TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
D2XAR0641	6×0.06W	24V DC	24V = 17	24V = 0.4	Cool White = 2	10
D2XAS0641	Single color	240V	240V = 13	240V = 0.7	Warm White = 1	

PHOTOMETRIC CURVES

