

Recessed Wooden Floor Light

LED COLOUR TEMPERATURE

2000K · 3000K · 6000K

OPTICS

N/A

INSTALLATION DIAGRAM


High Voltage



Low Voltage



A: Minimum space for external driver is 48mm
B: External IP67 water-proof box for driver of high voltage type

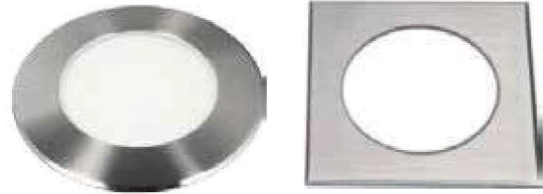

MATERIAL SPECIFICATIONS


- HOUSING** | 12# Die-casting dark grey powder coated aluminum
| T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
- FRONT RING** | Hard chrome plated stainless steel SUS 316L#
- LIGHT WINDOW** | Tempered frosted step glass. T=8mm
- GLASS PRESSURE CAPACITY** | Full area=3370kgs
- OPERATING TEMPERATURE** | -20°C~40°C
- POWER CABLE** | H05RN-F 2X1.0mm² L=0.5m (low voltage)
| H05RN-F 3X1.0mm² L=0.5m (high voltage)
- DIMMABLE SUPPORT** | Triac PWM 1-10V Dali




OUTER DIMENSIONS & ACCESSORIES

Unit:mm

High Voltage




D2XCR3641




D2XCS3641

Low Voltage



D2XCR3641



D2XCS3641

TECHNICAL DATA

ITEM	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
D2XCR3641	36×0.06W	24V DC	24V = 100	24V = 2.4	Cool White = 51	08
D2XCS3641	Single color	240V	240V = 29	240V = 3.1	Warm White = 42	

PHOTOMETRIC CURVES

