




**General Information**

	EST-TSL060B track	EST-TSL070B track	EST-TSL080B track	EST-SAL060B surface
Optics	15°~45° Zoomable	15°~30° Zoomable	15°~30° Zoomable	15°~45° Zoomable
System Power (Watt)	<b>9W</b>	<b>20W</b>	<b>30W</b>	<b>9W</b>
System Luminous flux (lm)	530lm	1100lm	1550lm	530lm
Driver parameters	36V/210mA	36V/480mA	36V/700mA	36V/210mA
Individual dimmable	•	•	•	



**Technical Details**

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistency	SDCM<3
UGR	<13
IP rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0 10V Dali
Options	2 Wire 1 Circuit Track / 3 Wire 1 Circuit Track / 4 Wire 3 Circuit Track / 6 Wire 3 Circuit Dali Track

**Dimensions (mm)**

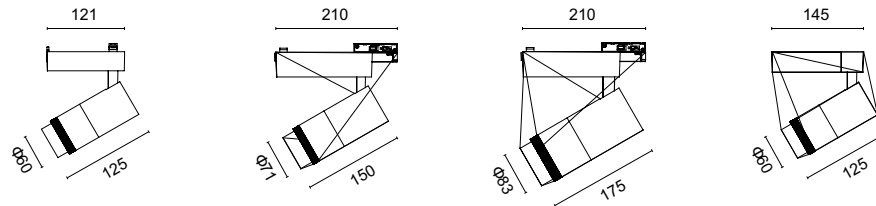

**Accessories**



Honey comb louvre Linear Spread


**Finishes**




White Black Titanium

**PHOTOMETRIC**


**EST-TSL060B 9W**

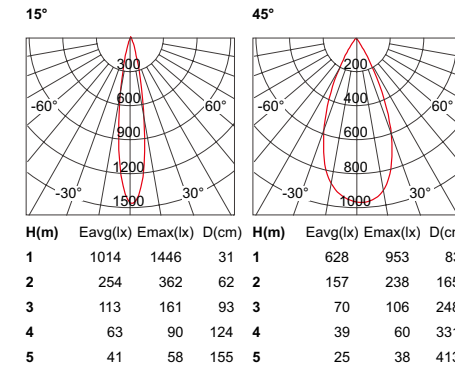

**EST-TSL070B 20W**

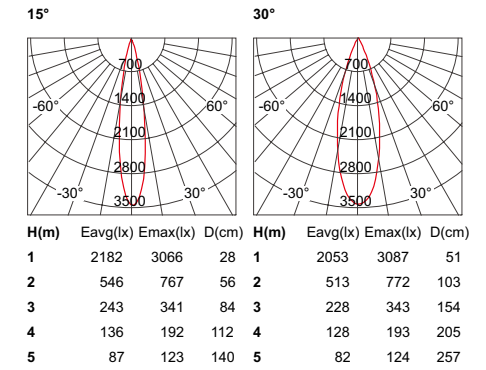

**EST-TSL080B 30W**

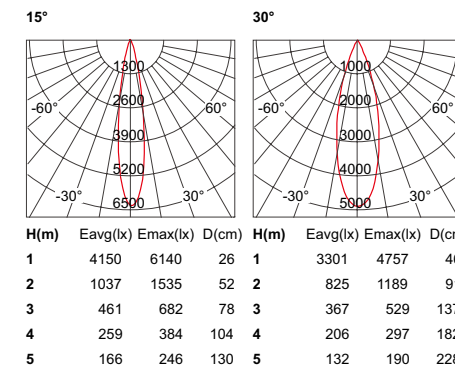

**EST-SAL060B 9W**

