


	EST-TSL050X track	EST-TSL060X track	EST-TSL070X track	EST-TSL080X track	EST-SAL050X surface	EST-SAL060X surface
General Information						
Optics	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°
System Power (Watt)	9W	15W	20W	30W	9W	15W
System Luminous flux (lm)	650lm	1000lm	1500lm	1750lm	650lm	1000lm
Driver parameters	36V/210mA	36V/360mA	36V/480mA	36V/700mA	36V/210mA	36V/360mA
Individual dimmable	



Technical Details

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistency	SDCM<3
UGR	<16
IP rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0 10V Dali
Options	2 Wire 1 Circuit Track / 3 Wire 1 Circuit Track / 4 Wire 3 Circuit Track / 6 Wire 3 Circuit Dali Track

Dimensions (mm)

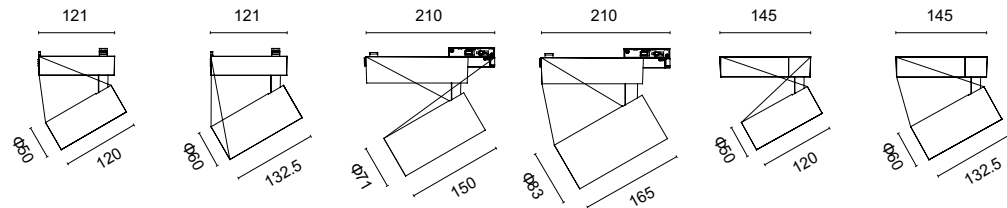

Accessories



Honey comb louvre Linear Spread


Finishes




White Black Titanium

PHOTOMETRIC


EST-TSL050X 9W

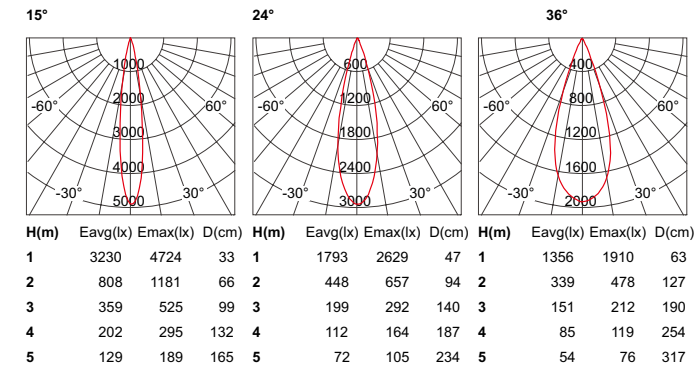


EST-TSL060X 15W

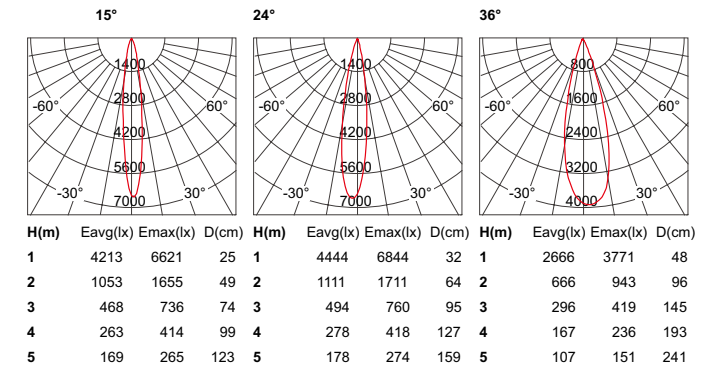


EST-TSL070X 20W

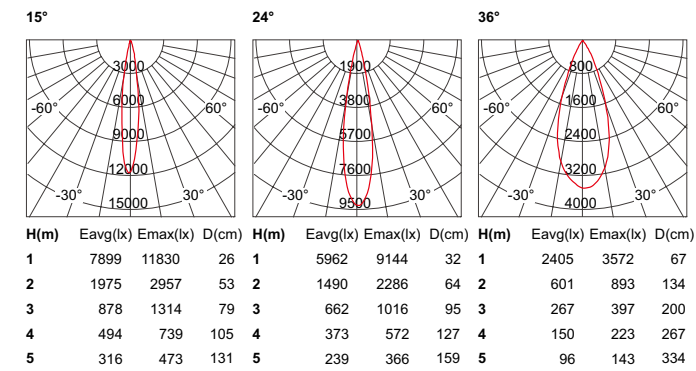

EST-TSL080X 30W

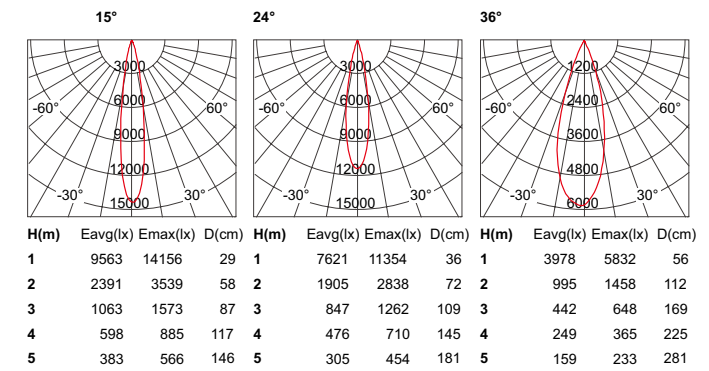

EST-SAL050X 9W

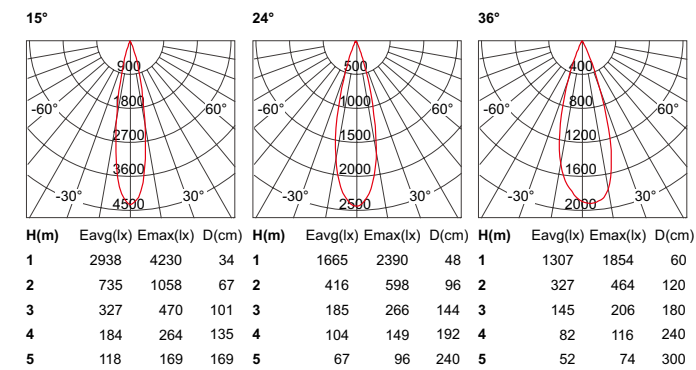

EST-SAL060X 15W

